

## Securefast SED991 Push Bar Panic Latch

Certified to EN1125:1997 + 2000:A1

Fire Rated for Timber and Steel Doors EN1634-1

Suitable for Single Doors and the Active Leaf (1st Opening) of Rebated Double Doors

Supplied Left or Right Hand, but can be reversed on site

Supplied with a cast keep for Single and Rebated Double Door applications – The keep can be surface mounted or morticed into the frame for a single door application.

Available with Manual Hold Back (not to be used on Fire Doors unless the door has been fire tested with unlatched hardware)

Can be used with a Rim Cylinder, Digital Code Lock or Outside Access Device fitted on the outside of the door.


The slave unit can be supplied with a Micro Switch for linking to an Access Control System.

Suitable for door 1300mm wide and 2500mm high

Outer Box Quantity - 4

Individual Box Size L124cm x W17.5cm x H7cm

Individual Weight 3.9kg

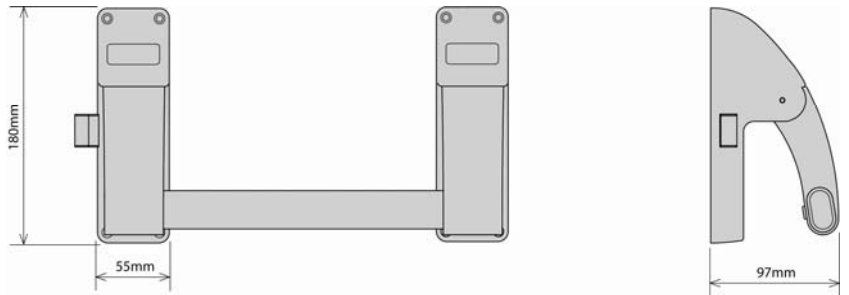

SED991/SE/RH  
Right Hand illustrated



### Accessories

SED990/xx/LE Outside Access Device with Lever Handle

SED990/xx/LEC Outside Access Device with Lever Handle and Cylinder

SED990/xx/KN Outside Access Device with Knob

SED990/xx/KN Outside Access Device with Knob and Cylinder

SBL329/P Easy Code Outside Access Mechanical Digital Lock with Knob and connecting spindle

SED999/A Rim Cylinder Adapter - For converting to use with a Rim Cylinder

SED999/M Micro-Switch Slave Unit - For linking to an Access Control or Monitoring System

ASU5021-SC Heavy Duty Kaba Digital Lock with Key Override