

# 18 WATT EXIT SIGN

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail  
Lighting



The EXS Light is a large general purpose, emergency escape route sign suitable for open areas.

- White stove-enamelled, zintec-coated sheet steel base
- Fitted self-extinguishing legend panel.
- IP20 ingress protection.
- Cable knockouts provided in sides and top, with a BESA entry in the back.
- Designed in accordance with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Choice of alternative finishes, any British Standard or RAL colour.
- Switchable, Maintained and Non-Maintained versions available.

## Specification

- IP20 (Interior Use)
- Downlight Facility
- Ceiling mounted option
- Colour Options
- Self-Contained




## Options

### Options

/CR	Chrome finish
/L	Arrow Left
/R	Arrow Right
/ST	Self test
/TS	Test switch
/DALI	DALI
/CM	Ceiling mounted option

Note: All exit signs are arrow down as standard please specify other direction if required

## Dimensions

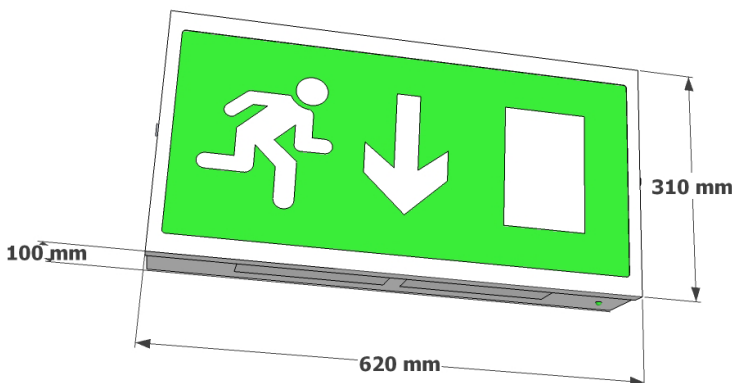

## Viewing Distance

Viewing Distances	57 Metres
-------------------	-----------

## Suitable Applications

- Designed for use on escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

## Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight
<b>EXS18NM</b>	Non Maintained	18W T8	9 W	3.6V 4Ah	3 Hours	4.30 Kg
<b>EXS18M</b>	Maintained	18W T8	38 W	3.6V 4Ah	3 Hours	4.50 Kg
<b>EXS18/SL/*</b>	ACDC Slave. * suffix voltage required with 24, 50, 110					
<b>EXS18/230/HF</b>	Mains only / Static inverter					

## Installation Notes

- Cable knockouts provided in sides and top, with a BESA entry in the back.
- Ceiling mounted option available.

## Materials / Finish

- White stove-enamelled, zintec-coated sheet steel base fitted with a self-extinguishing legend panel.
- Choice of alternative finishes, any British Standard or RAL colour.

## Catalogue Numbers

<b>EXS18NM</b>	Non Maintained
<b>EXS18M</b>	Maintained
<b>EXS18/SL/*</b>	ACDC Slave. * suffix voltage required with 24, 50, 110
<b>EXS18/230/HF</b>	Mains only / Static inverter