

Carbon Monoxide Alarm

MAINS POWERED 230V~

Remote System Control Capability
& Rechargeable Battery Back-Up

Model Ei261DENRC CO Alarm

- Remote System Control capability
- Easi-fit base
- Proven electrochemical sensor
- Tamper-proof rechargeable Lithium battery back-up
- Unique easy to replace sensor module
- Memory feature records if CO has been detected
- Easy to use Test/Hush button
- Automatic self diagnostics
- Digital CO level display
- Loud distinctive alarm (85 dB(A) at 3 metres)
- Power, alarm and fault indicator lights
- Interconnectable to other Ei mains powered alarms
- Fast CO test mode
- Kitemarked to BSEN 50291:2001
- 5 Year guarantee (limited)



Product Description

The Ei261DENRC is a Carbon Monoxide(CO) alarm powered by 230V AC mains power, and has built in tamper proof rechargeable Lithium cells that act as a battery back up in the event of mains failure. These rechargeable Lithium cells are designed to have a ten-year life and outlast the life of the CO alarm. They will provide up to 4 weeks of CO alarm operation without mains power.

The Ei261DENRC also has Remote Control capability - allowing the alarm to be controlled remotely from a Control Switch (Ei1529RC). This then allows remote Test, Locate and Hush function to be performed. If the Ei261DENRC is also interconnected to other Ei 'RC' mains powered alarms, then the whole system can be controlled remotely. Up to twelve alarms can be interconnected. A Manual Call Point (MCP401RC) is also available.

The Ei261DENRC is supplied with an Easi-Fit base that allows very quick and simple installation of the alarm, combined with simple removal and replacement. The Easi-Fit base automatically connects both mains power and battery as the alarm slides on to the base.

The Ei261DENRC uses a high performance electrochemical sensor to sense CO presence. The sensor can be replaced after 5 years to provide a combined 10 year protection against CO gas.

The Ei261DENRC has a digital display to show the CO level sensed.

The Ei261DENRC has built in circuitry to aid suppression of voltage transients and RF interference.

Operation

- The green indicator will illuminate to show mains power is present
- The horn will sound and the digital display will show the level of CO gas sensed
- The horn will beep every 40 seconds and the digital display will show **SF** in the event of a sensor fault
- The horn will beep every 40 seconds and the digital display will show **CP** (Connect Power) to indicate the battery back up is depleted and needs recharging
- The "Test/Hush" button will either silence false alarms (if briefly pressed) or perform a unit self test (if pressed and held). Note that the alarm cannot be silenced when sensing a CO level of 300ppm or above
- Memory Feature - when the test button is pressed the horn will sound and the digital display will show the level of CO gas previously sensed
- When interconnected to other Ei mains powered alarms, an alarm on one detector will trigger all other interconnected alarms (only the triggered alarm will flash a red indicator and show the CO level on the digital display)



Shannon Free Zone, Shannon, Co. Clare, Ireland.
Ph.+353 61 471277 Fx.+353 61 471053
Email. eielectronics@eilttd.ie
Web: www.eielectronics.com

Model Ei261DENRC CO Alarm


Technical Specification

Sensor	Electrochemical sensor	Power-On Indicator:	Continuous green LED
Sensitivity:	Meets BS EN 50291:2001	Alarm:	Electronic Piezoelectric horn
Button Test:	Checks the electronics and horn	Alarm Sound Output:	85dB(A) (minimum) at 3m
Fast CO Test Mode:	Alarm sounds and red indicator flashes as soon as CO is detected – the rate of flash indicating the CO level	Alarm Status:	Horn sounds, digital display shows CO level and red LED flashes
Memory Feature	When the Test button is pressed the horn will sound and the digital display will show the level of CO gas previously sensed	Temperature Range:	-10° to +40 °C
Automatic Self-Test:	The horn will beep every 40 seconds and the digital display will show SF in the event of a sensor fault	Humidity Range:	15% to 95% Relative Humidity
Supply Voltage:	230V AC, 50 Hz	Interconnect:	Up to 12 of these units can be interconnected: - Ei261ENRC/261DENRC CO alarm - Ei161RC/164RC/166RC smoke or heat alarms - Ei128RBU relay base Use with optional control (see below)
Battery back up:	Rechargeable Lithium cells	Optional Controls:	- Ei1529RC Control Switch - MCP401RC Manual Call Point
Dimensions:	126 x 150 x 42 mm	Fixing:	Easi-Fit mounting base
Weight:	330g	Plastic material:	UL94VO flame retardant
		Guarantee:	5 year (limited)
		Approvals:	Kitemarked to BS EN 50291:2001 (License no. KM86596) and CE certified

Specifications are subject to change

System Wiring

Wiring for Interconnected Alarms with optional Remote System Control Switch & Manual Call Point

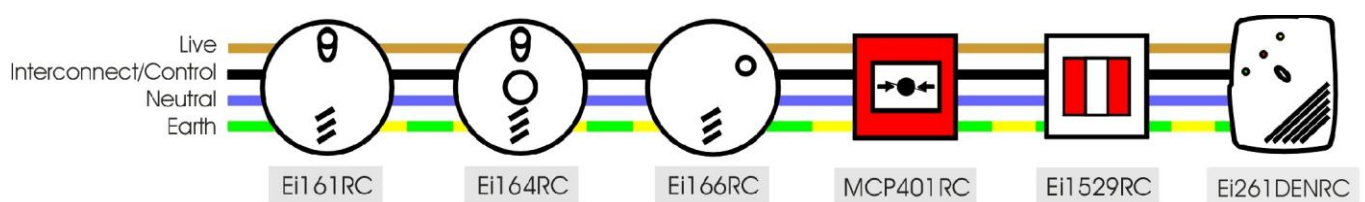

Ensure correct wiring of the alarms and switches as mixing Live and Neutral will blow / damage interconnected units.