


The MPR Light is a decorative, edge illuminated escape route and direction sign. Comprising of a white finished base and bezel fitted with a suspended clear legend panel. The legend panel is available to comply with the Health & Safety signs Directive of 1996, and for retrofit into extensions the BS5499 legends remain available. Cable entry is by a BESA entry in the base and cut out dimension required is 380 x 120mm. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005 the MPR Light is available in brass and chrome finishes to order. Slave versions available in 24/50/110 Volt AC/DC, suffix part no. * with voltage required. A chain suspended edge lit sign is also available see MP Range.

- IP20 (Interior Use)
- Recessed Elegant Sign
- Ceiling Mounting
- White Finish as standard
- Other Finishes Available
- Self-Contained/Slave versions
- Centrally Supplied

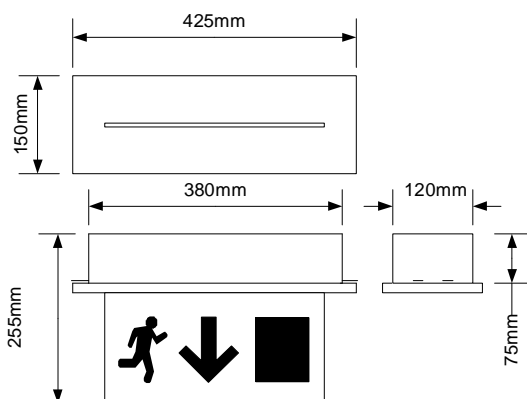

	Mode	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output	Dimensions
MPR8NM	Non Maintained	8W T5	8 VA	2.4V 4Ah	3 Hours	1.75 Kg	100 Lumens	When unit is installed the blade protrudes 180mm from the ceiling
MPR8M	Maintained	8W T5	20 VA	2.4V 4Ah	3 Hours	2 Kg	100 Lumens	The bezel is 425mm x 150mm and the legend is 325mm wide (Cut Out 380mm x 120mm)
MPR8/SL/*	Mains or Slave	8W T5	7 - 20 VA			1.5 Kg	270 Lumens	

* Please suffix voltage required i.e. 24, 50, 110, 230

Suffix part number with

/OP	-	Opal diffuser
/BR	-	Brass finish
/CR	-	Chrome finish
/ST	-	Self Test

NOTE: All exit signs arrow down as standard if other direction is required please specify