

# 8 WATT BULKHEAD

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

**Ringtail**  
Lighting



JP - Square prismatic diffuser



JPX - Curved fresnel diffuser

**The JP Light is a general purpose, emergency luminaire. It's ideal for arduous interior and all exterior environments and suitable for industrial applications.**


- White, moulded, self-extinguishing polycarbonate base.
- JP - Fitted with square prismatic diffuser.
- JPX - Fitted with a fresnel curved diffuser.
- Passes the 850°C hot-wire test, as defined by ICEL.
- Sealed up to IP65.
- Complying with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Cable knock-outs are provided in the ends, with a BESA entry in the base.
- Can be fitted with universal legend kits (part no. ULK) - Suitable for use as an external IP65 exit sign.
- Optional recessing kit available.
- Diecast base option available
- Switchable, Maintained, Non-Maintained and Sustained versions available together with 110v AC input for use in temporary construction sites.

## Specification


- Optional recessing flange
- IP65 (Weatherproof)
- Vandal Resistant
- Polycarbonate Base
- 8W T5 Lamp
- Self-Contained
- Hinged Gear Tray
- 110v AC version available
- -25°C version in maintained only.



## Dimensions

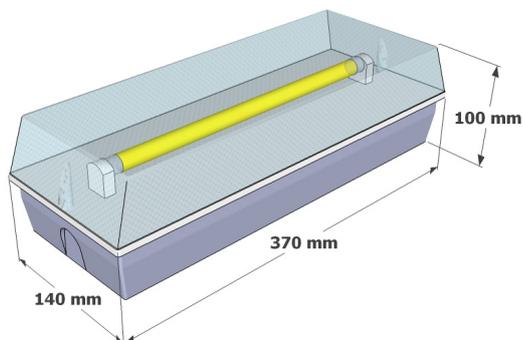

JP - Square prismatic diffuser

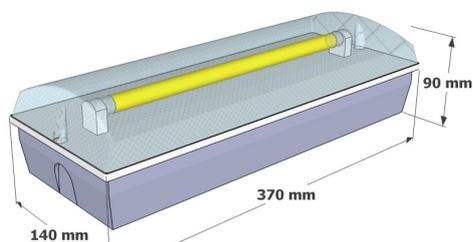

JPX - Curved fresnel diffuser

## Options

### Options

/BK	Black base
/OP	Opal diffuser
/-25	Low temp to -25°C (maintained only)
/SS	Security screws
/D	Diecast base
JPX	Fresnel curved diffuser
/BEZ	Recessing bezel
/DALI	DALI
/TS	Test Switch
/ST	Self Test
JP8S	Sustained

## Suitable Applications

- Suitable for all escape routes including final exits and intersections.
- Suitable for use in harsh environments cold storage complexes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

## Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output
<b>JP8NM</b>	Non Maintained	8W T5	8 W	2.4V 4Ah	3 Hours	1.28 Kg	100 Lumens
<b>JP8M</b>	Maintained	8W T5	20 W	2.4V 4Ah	3 Hours	1.45 Kg	100 Lumens
<b>JP8/SL/*</b>	110v ACDC Slave.						
<b>JP/230/HF</b>	Mains only / Static inverter						

## Installation Notes

- Can be readily recessed with the optional recessing bezel.
- Diffuser attached by captive screws.
- Gear tray is hinged for ease of installation.

## Materials / Finish

- White, moulded, self-extinguishing polycarbonate base.
- JP - Fitted with square prismatic diffuser.
- JPX - Fitted with a fresnel curved diffuser.
- Black Polycarbonate base optional.
- Diecast base optional.

## Catalogue Numbers

<b>JP8NM</b>	Non Maintained
<b>JP8M</b>	Maintained
<b>JP8/SL/110</b>	110v ACDC Slave.
<b>JP/230/HF</b>	Mains only / Static inverter