DISCREET LED EMERGENCY LIGHTING

Ringtail



This unit is the ultimate in concealed emergency lighting. A single LED and remote battery pack make an attractive alternative.

- LED down lighter using one, high-illumination white LED in a 50mm diameter white polycarbonate housing.
- Exceptionally economical unit Low energy requirement, long life-span LEDs and batteries.
- Complying with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- IP30 Rated.

dil.co.uk

- Available in round or square formats.
- Also available is an intumescent hood to restore the fire rating of the ceiling if required.

Specification


- Non Maintained
- 40mm Cut out
- Recess mounted
- 50mm diameter viewable
- White High Output LED
- Status Indicator LED



-		
	pti	26

Options	
/SURF	Surface mount enclosure
/DALI	DALI

Note: All exit signs are arrow down as standard please specify other direction if required

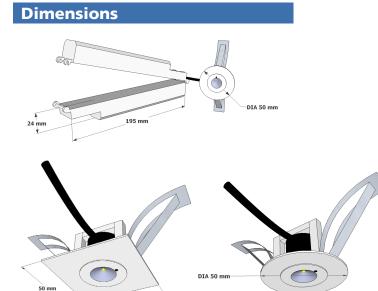

50 m

Suitable Applications

- Suitable for us on escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.



DISCREET LED EMERGENCY LIGHTING

2 336335 - sales@ringtail.co.uk

Technical Specification

natai

	Model	Lamp Type	Power Con	Battery	Duration	Weight
TWR3NM & TWS3NM	Non Maintained	3W LED	5.6VA	2.4V 4Ah	3 Hours	1.98 Kg
TWR3NM/ST & TWS3NM/ST	Non Maintained	3W LED	7.65VA	2.4V 4Ah	3 Hours	2.15 Kg

Installation Notes

- Recess mounting option -40mm diameter cut out.
- Surface mount option available.

Surface Mounted option

Materials / Finish

LED driver and battery pack are enclosed in a white articulated plastic housing.

Mounting Height

Mounting Height (M)	⊒ ≁→[]	[⊷]			
2.5	3.40	5.90	5.90	3.40	OPEN AREAS 0.5 LUX MIN
4.0	3.60	8.89	8.89	3.60	(ANTI-PANIC)
2.5	2.50	5.90	5.90	2.50	ESCAPE ROUTE 1.0 LUX MIN
4.0	2.30	7.30	7.30	2.30	(NORMAL RISK)

Catalogue Numbers

TWR3NM & TWS3NM	Non Maintained	3W LED
TWR3NM/ST & TWS3NM/ST	Non Maintained	3W LED

