

The FMPR Light is a decorative, recessed, edge-illuminated escape route and direction sign with down light facility for indoor use.



- Comprising a stove-enamelled sheet steel base.
- Suspended clear legend panel.
- Designed in accordance with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- IP20 ingress protection.
- The FMPR is white as standard also available in a wide number of alternative finishes, including British Standard or RAL colour, brass, chrome and satin.
- Switchable, Maintained and Non Maintained versions available.

Specification

- IP20 (Interior Use)
- Recessed Sign
- Ceiling Mounting
- Prismatic Diffuser
- Hinged Gear Tray
- Legend Options
- Colour Options
- Self-Contained




Options

Options

/BR	Brass finish
/CR	Chrome finish
/LR	Arrow Left / Arrow Right
/DS	Doublesided legend
/ST	Self test
/TS	Test switch
/DALI	DALI

Note: All exit signs are arrow down as standard please specify other direction if required

Dimensions

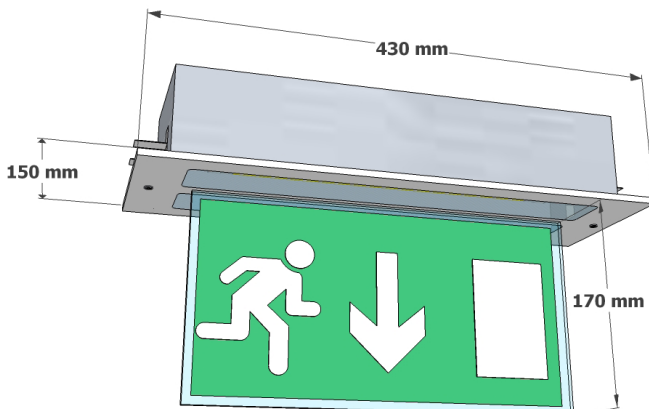

Viewing Distance

Viewing Distances	31 Metres
-------------------	-----------

Suitable Applications

- Suitable for all escape routes and intersections.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight
FMPR8NM	Non Maintained	8W T5	8 W	2.4V 4Ah	3 Hours	2.53 Kg
FMPR8M	Maintained	8W T5	20 W	2.4V 4Ah	3 Hours	2.70 Kg
FMPR8/SL/*	ACDC Slave. * suffix voltage required with 24, 50, 110					
FMPR8/230/HF	Mains only / Static inverter					

Installation Notes

- The gear tray is easily removable to allow first fix of the base.
- Cable knockouts are provided in the ends and a BESA entry in the base.

Materials / Finish

- Comprising a stove-enamelled sheet steel base.
- Fitted with a clear prismatic diffuser retained by a white bezel.
- White as standard, wide number of alternative finishes, including British Standard or RAL colour, brass, chrome and satin.

Catalogue Numbers

FMPR8NM	Non Maintained
FMPR8M	Maintained
FMPR8/SL/*	ACDC Slave. * suffix voltage required with 24, 50, 110
FMPR8/230/HF	Mains only / Static inverter