

ANCILLARY PRODUCTS

LOOP EMULATOR







The TE-TLE is a 'virtual' loop device. Once the Fire Alarm Control Panel is connected to the computer via the Interface, a 'virtual' loop can be created within the True Loop Emulator software.


Devices can be selected and 'placed' on addresses on the loop. These devices can then be activated with a number of different actions such as 'fire' or 'short-circuit' conditions, to test the panel's reactions and programming. In this way, a complete fire detection system can be tested and proven before any actual hardwiring commences, saving time and resources.


Each Interface can handle up to four loops of devices and the software can handle one or two Interfaces. Thus, up to eight loops of devices can be emulated simultaneously.



- ▶ Allows simulation of up to 4 loops of Hochiki analogue devices
- System 'Cause and Effect' can be verified along with double address and short circuit simulation
- Saves time and installation costs as whole system can be tested 'virtually'



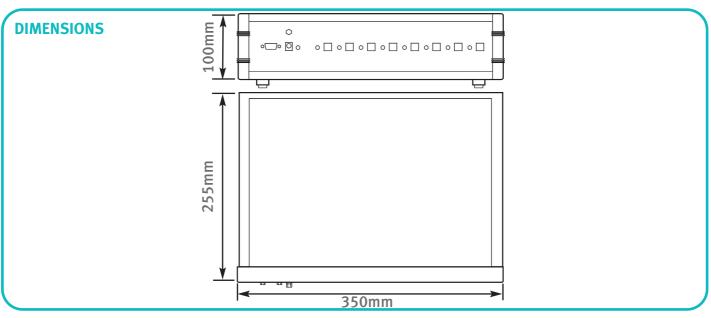

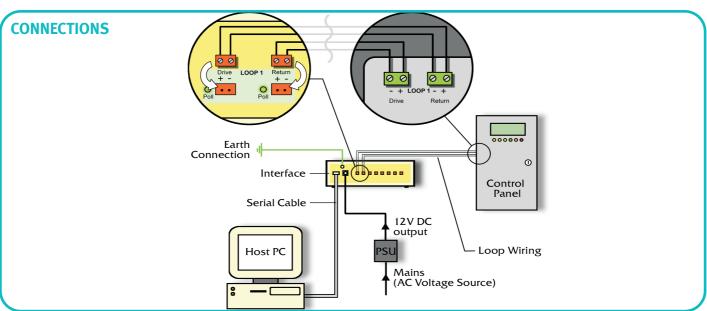

Ordering Code		TE-TLE	
Interface:	Power supply	Input voltage range 240Vac	
		Output voltage 12Vdc	
Software:	Operating System	Windows 95, 98,NT & 2000	
	Capability	Supports 8 loops (via 2 interfaces)	
Connection between PC & Interface		Serial RS232	
Weight (Kg)		2.41	

HOCHIKI EUROPE (UK) LIMITED

Grosvenor Road, Gillingham Business Park, Gillingham, Kent, England ME8 0SA Telephone: +44 (0)1634 260133 Facsimile: +44 (0)1634 260132

e-mail (UK): sales@hochikieurope.com e-mail (Non UK): export@hochikieurope.com

www.hochikieurope.com



Assessed to ISO 14001 : 1996

Hochiki Europe (UK) Ltd. reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki Europe (UK) Ltd. to be a complete and up-to-date description.

PART No. 9-5-0-261/ISS1/OCT04