

Cig-Arrête Sounder Beacon (Part No CSA-CSB)




Combined Sounder / Beacon

The Cig-Arrête Combined Sounder Beacon provides both a visual and audible indication that an alarm has been generated by the Cig-Arrête System.

The CSA-CSB requires 24V dc from an external power supply. Both the CSA-246 or CSA-110 (for the USA) are designed for use with the CSA-CSB sounder/beacon. Connections are shown below.

Volume, tone and flash only are user programmable

Installation and Configuration

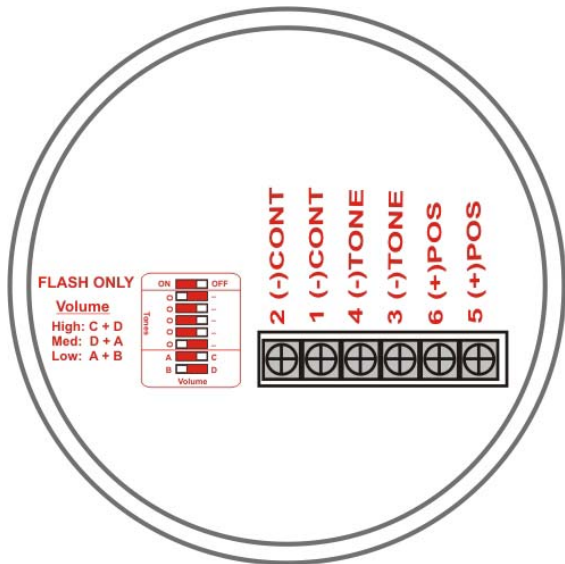

Technical Specification

Voltage	18–24 V dc
Typical Current	
High	41mA
Med	20mA
Low	14mA
Typical Output	
High	106 dB
Med	101 dB
Low	85 dB

