

Product Information Sheet

Cig-Arrête Power Supply (UK Only) (Part No CSA-PSU)




Description

The Cig-Arrête Power Supply is designed to operate directly from the mains supply. The unit is a 3 pin plug in supply rated at 240V ac and is only suitable for mains operation in the United Kingdom.

Note: UK PRODUCT ONLY

Wiring Diagram

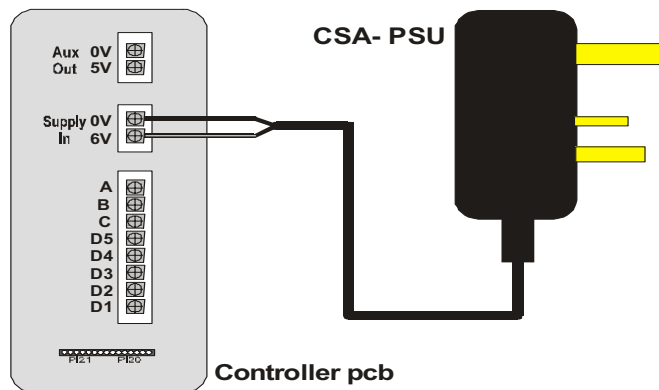

Specifications

Mains Voltage	240V ac
Output Current	350 mA (max)
Output Voltage	6V dc
Cable Length	0.5m

Installation Details

REMOVE ALL BATTERIES FROM CONTROLLER AND DISCARD. BATTERY & MAINS SUPPLY CANNOT BE USED TOGETHER OR DAMAGE MAY RESULT.

Connect the CSA-PSU unit to the Cig-Arrête Controller as shown in the diagram above. Ensure that you connect the cable with the white stripe to the +6Vdc terminal. You may have to cut off the jack plugs at the controller end of the power supply lead and then terminate as shown above. Plug the CSA-PSU into a 3 pin 13 Amp socket outlet.

The CSA-PSU can be used to power up to 3 controllers (CSA-S5B or CSA- S5BAR). Other power supply units must not be used as the CSA-PSU is a highly regulated supply. Using other power supplies may cause damage to your Cig-Arrête system.

Innovation for a new tomorrow

Radal Technology Ltd
Unit 1 Webber Court
Billington Road
Burnley
Lancashire BB11 5UB
England

Issue No: CSA/PSU 031202

Phone: +44 (0)1282 463 770
Fax: +44 (0)1282 463 771
Email: info@radaltechnology.com

