

STI Wireless Alert Series



PRODUCT OVERVIEW

The Wireless Alert Series has been specially designed to protect and monitor all areas of your business from one convenient location.

HOW IT WORKS

Using innovative wireless technology, the integrated system monitors STI wireless alert devices. The STI device(s) emits a localised alarm and also transmits a triggering alert signal to the 8-Channel Receiver. The receiver provides a visual and optional audible indication every time there is unauthorised or authorised opening of a fire door or the removal of a fire extinguisher. By combining the unique features of the Exit and Extinguisher Stopper®, fire doors and fire extinguishers will be monitored 24/7, improving the fire safety of buildings and their occupants. The remote 8-Channel Receiver can be placed up to 300 metres (line of sight) from the monitored fire door(s) or extinguisher(s). The compact design makes it easy to either wall-mount or place on a desk. The 8-Channel Receiver is capable of remote wireless monitoring up to 8 individual devices and provides supervision for low battery and signal reception of STI wireless alert devices. The inbuilt relay can also allow you to trigger additional external systems or warning devices during activation if required.

KEY FEATURES

General Information

- Specially designed to protect and monitor all areas of your business from one convenient location.

Design

- Receivers monitor up to 1, 4 or 8 devices. Single Channel connects sensors to control panel, 4-Channel Voice offers 10 tones tunes and 53 selectable words (English or Spanish) and 8-Channel has a mirror function to work with additional receivers.

Installation

- Mount sensors in desired location, plug the receiver into an indoor electrical outlet and the device is ready to monitor.

Options

- A wireless signal is sent from the sensor to the receiver when monitored site is activated.
- Supervised for low battery and signal reception. Audible chime tone and 12 volt output. 4-Channel Voice and 8-Channel Receivers can be latching or momentary by each zone.
- Can monitor a large variety of devices.
- Works with all wireless alerts.
- STI-V34104 has easy voice prompt receiver recognises transmitter.
- STI-V34104 selectable words can be programmed simultaneously in sets of up to four to create custom message.




For more information, call +44 (0)1527 520 999 or visit www.sti-emea.com

STI Wireless Alert Series

Dimensions and Technical Information

MODELS AVAILABLE

STI-34108	8-Channel Receiver
STI-34201	Mailbox Alert Sensor
STI-34301	Garage Sentry Sensor
STI-34400	Wireless Universal Alert
STI-34401	Universal Alert Sensor
STI-34451	Door Chime Sensor
STI-34098	Single Slave Receiver
STI-34601	Wireless Doorbell Button
STI-V34104	4-Channel Voice Receiver

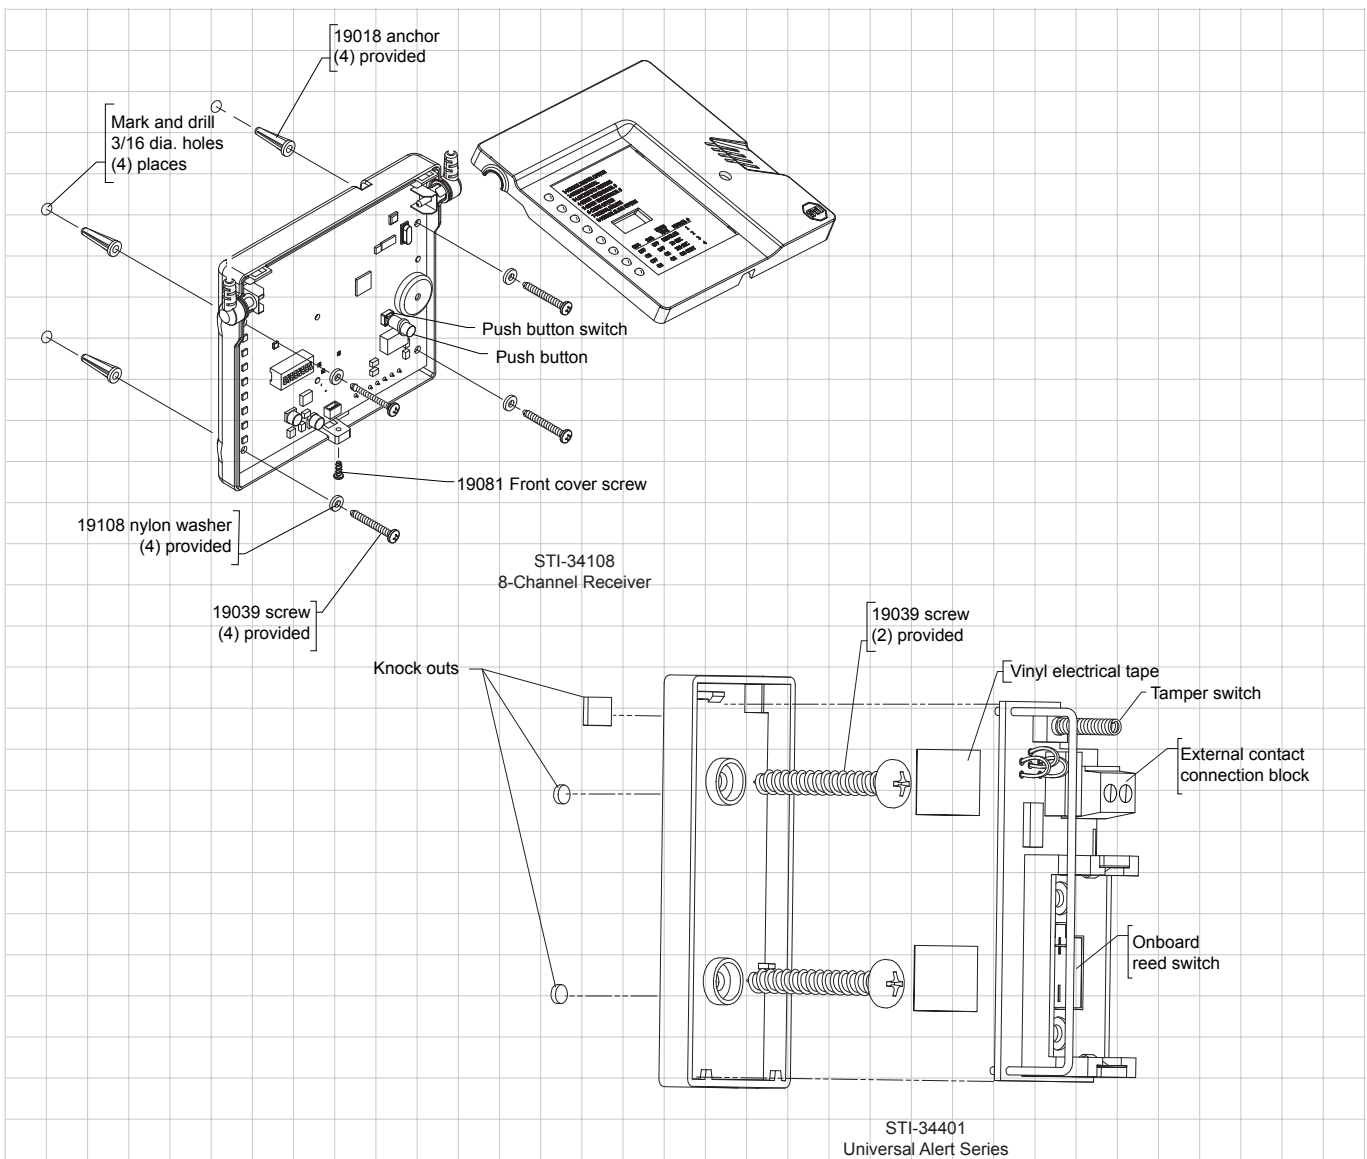

	<h2>Safety Technology International</h2>	<p>UK Office Taylor House 34 Sherwood Road Bromsgrove Worcestershire B60 3DR, England</p>	<p>Tel: +44 (0)1527 520 999 Fax: +44 (0)1527 501 999 info@sti-emea.com www.sti-emea.com</p>	<p>USA Head Office 2306 Airport Road Waterford, Michigan 48327 - 1209</p>	<p>Tel: +248-673-9898 Fax: +248-673-1246 Toll-free: 0800-888-4STI info@sti-usa.com www.sti-usa.com</p>
		<p>© 1987-2016 Safety Technology International Ltd. 34000_WirelessAlertSeries_Rev0217</p>			