



**DISCOVERY  
HEAT  
DETECTOR**

Part Number 58000-400

Discovery heat detectors have a common profile with ionisation and optical smoke detectors but have a low air flow resistance case made of self-extinguishing white polycarbonate.

The Discovery Heat Detector (Fig. 5) uses a single thermistor to sense the air temperature at the detector position. The thermistor is connected in a resistor network, which produces a voltage output dependent on temperature. The design of the resistor network, together with the processing algorithm in the microcontroller, gives an approximately linear characteristic from 10°C to 80°C. This linearised signal is further processed, depending on the response mode selected, and converted to an analogue output.


For the European standard version of the detector, the five modes correspond to five “classes” as defined in EN 54-5. The classes in this standard correspond with different response behaviour, each of which is designed to be suitable for a range of application temperatures. All modes incorporate “fixed temperature” response, which is defined in the standard by the “static response temperature”. The application temperatures and static response temperatures for all response modes are given in Table 4.

In addition to the basic classification, a detector may be given an “R” or “S” suffix. The “R” suffix indicates that the detector has been shown to have a rate-of-rise characteristic. Such a

detector will still give a rapid response even when starting from an ambient temperature well below its typical application temperature. This type of detector is therefore suitable for areas such as unheated warehouses in which the ambient temperature may be very low for long periods.

The “S” suffix on the other hand indicates that the detector will not respond below its minimum static response temperature even when exposed to high rates of rise of air temperature. This type is therefore suitable for areas such as kitchens and boiler rooms where large, rapid temperature changes are considered normal.

14

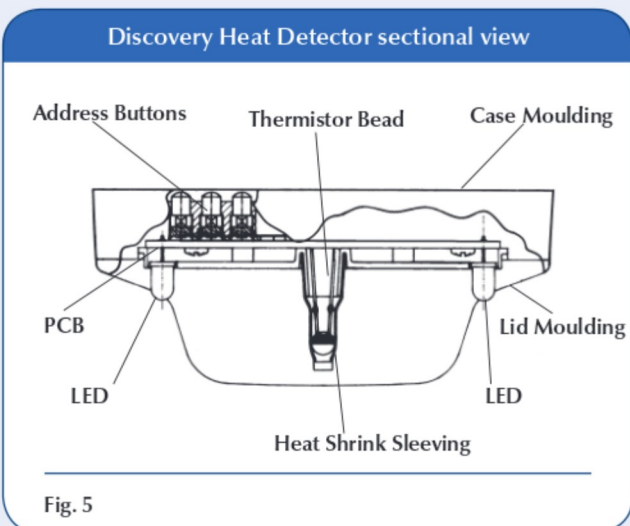

**Discovery Heat Detector response modes**

Mode	Class EN 54-5	Application Temperature		Static Response Temperature		
		Typical	Max	Min	Typ	Max
1	A1R	25°C	50°C	54°C	57°C	65°C
2	A2R	25°C	50°C	54°C	61°C	70°C
3	A2S	25°C	50°C	54°C	61°C	70°C
4	CR	55°C	80°C	84°C	90°C	100°C
5	CS	55°C	80°C	84°C	90°C	100°C

For air temperatures in the range 15°C to 55°C, the analogue value for a detector in mode 1 will correspond approximately to the air temperature.

**Table 4**

## TECHNICAL DATA

Discovery Heat Detector  
Part No. 58000-400

Specifications are typical at 24V, 23°C and 50% relative humidity unless otherwise stated.

<b>Detector principle:</b>	Heat sensitive resistance	
<b>Supply wiring:</b>	Two-wire supply, polarity insensitive	
<b>Terminal functions:</b>	L1 & L2 supply in and out connections	
	+R	remote indicator positive connection (internal 2.2kΩ resistance to positive)
	-R	remote indicator negative connection (internal 2.2kΩ resistance to negative)
<b>Operating voltage:</b>	17–28V DC	
<b>Communication protocol:</b>	Discovery, XP95 & CoreProtocol compatible 5-9V peak to peak	
<b>Quiescent current:</b>	350µA	
<b>Power-up surge current:</b>	1mA	
<b>Maximum power-up time:</b>	10s	
<b>Alarm current, LED illuminated:</b>	3.4mA	
<b>Remote output characteristics:</b>	Connects to positive line through 4.5kΩ (5mA maximum)	
<b>Alarm level analogue value:</b>	55	
<b>Alarm indicator:</b>	2 red Light Emitting Diodes (LEDs). Optional remote LED	
<b>Temperature range:</b>	Minimum operating temperature	-40°C
	Maximum operating temperature	see Table 4
	Storage	-40°C to 80°C
<b>Humidity:</b>	0% to 95% RH (no condensation or icing)	
<b>Vibration, impact &amp; shock:</b>	EN 54-5	
<b>Designed to IP Rating:</b>	IP54 in accordance with BS EN 60529	
<b>Standards &amp; approvals:</b>	EN 54-5, CPD, LPCB, VdS, AFNOR, BOSEC, FG, SBSC, SIL & VNIPO For more information see page 31 or <a href="http://www.apollo-fire.co.uk">www.apollo-fire.co.uk</a>	
<b>Dimensions:</b>	100mm diameter x 42mm height (50mm height with XPERT 7 Mounting Base)	
<b>Weight:</b>	Detector	105g
	Detector with XPERT 7 Mounting Base	160g
<b>Materials:</b>	Housing	White polycarbonate UL94-V0
	Terminals	Nickel plated stainless steel