

IP65 COMPACT LED BULKHEAD

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting

The X-CSE light is a high light output LED, emergency bulkhead suitable for internal and external environments.



- Manufactured in a moulded polycarbonate base.
- Fitted with a Fresnel diffuser.
- Low profile emergency luminaire suitable for internal and external environments.
- IP65 Rated.
- Cable entry provided in the base.
- Complying with the requirements of EN60598-2-22
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Can be equipped with universal legend kit making it suitable for use as an exit sign.
- Dual fitting - Can be operated in either maintained or non-maintained operation.

Specification

- IP65
- Polycarbonate base
- Fresnel Diffuser
- 0°C to 40°C operating temperature
- Test switch optional




Options

Options

ULK	Universal legend kit
BEZ/R	Semi-recessing kit
/TS	Test switch

Dimensions

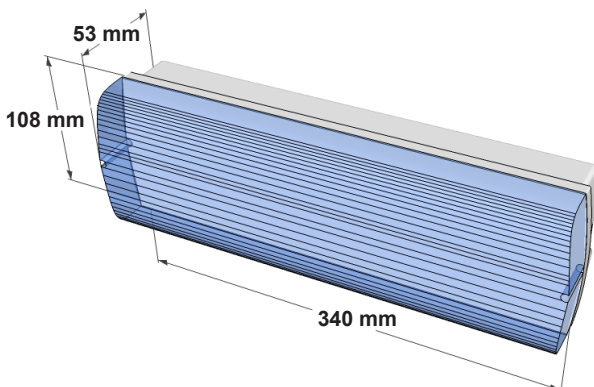

Suitable Applications

- Suitable for use on interior and exterior escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

Model	Lamp Type	Power Con	Battery	Duration	Weight	Lumens
X-CSE3M Maintained / Non-Maintained	LED	3 W	3.6V 1.5Ah	3 Hours	0.67 Kg	100 Lumens

Installation Notes

- Surface mounted as standard.
- Hinged screwless gear tray for ease of installation
- Semi recessing kit available.

Materials / Finish

- Manufactured in a moulded polycarbonate base.
- Fitted with a fresnel diffuser.

Catalogue Numbers

X-CSE3M Maintained / Non-Maintained