

LED SUSPENDED EXIT SIGN

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting



The MPI Light is a decorative, suspended, LED illuminated escape route and direction sign.

- High illumination LEDs in a small compact design.
- Designed in accordance with the requirements of EN60598-2-22.
- Suitable for incorporation into emergency lighting system complying with BS5266-1:2011.
- IP40 rated.
- Self testing exit sign - continuously tests battery voltage and the operation of LED's.
- Diverse mounting options suitable for multiple applications with swivel knuckle connection.
- This luminaire can be operated in maintained or non – maintained mode. Factory set to maintained operation but to switch to non – maintained after connecting to the mains supply press and hold the test button.
- Other Legend types available.

Specification

- Adjustable drop length
- White LED's light source
- Manual test button
- Operating temp 0°C to 40°C
- Self Test
- Full drop 640 / 700 mm.
- Recess cutout 272 x 46mm.




Options

Options

/SK	Swivel knuckle connections
/LR	Arrow Left / Arrow Right
/UD	Arrow Up / Arrow Down

Note: All exit signs are arrow down as standard please specify other direction if required

Dimensions

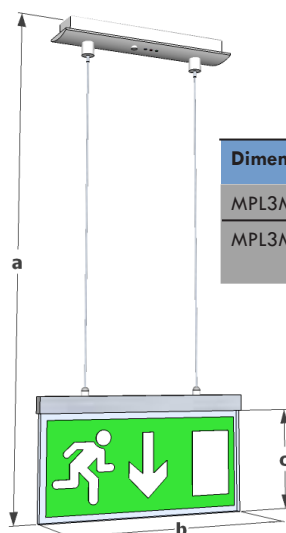

Dimensions (mm)

MPL3M-8	a=640, b=280, c=90
MPL3M-11	a=700, b=340, c=160

Viewing Distance

Viewing Distances

MPL3M-8	18 Metres
MPL3M-11	30 Metres

Suitable Applications

- Suitable for escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

Model	Mode	Lamp	Battery	Power Con	Duration	Weight	Output (lumens)	Sign Dimensions (mm)
MPL3M-8	Maintained	12 LED's	3.6V 1Ah	6 VA	3 Hours	980g	45	280 x 90
MPL3M-11	Maintained	15 LED's	3.6V 1Ah	6.5 VA	3 Hours	1.15Kg	55	340 x 170

Installation Notes

- Swivel knuckle joint option - mount unit either wall or ceiling.
- Recessed or surface mounted.

Materials / Finish

- Control gear box finished in RAL 9010.
- LED housing manufactured in aluminium.
 - Self extinguishing LED exit legend.

Catalogue Numbers

MPL3M-8	Maintained	12 LED's
MPL3M-11	Maintained	15 LED's