


This new X-FMPRL is a decorative, illuminated escape route and direction sign light. Using high illumination white LED's, in a small compact shell, with self test facility, it is virtually maintenance free. It is designed to be recess mounted in ceilings allowing emergency lighting and escape route lighting to be provided in a low profile. Comprising of a stove enamelled sheet steel base fitted with a clear prismatic diffuser retained by a white bezel, suitable for use on escape routes (850 degrees C Hot-wire test, defined by ICEL). The diffuser is attached by captive screws and provides a seal to IP20. The gear tray is hinged for ease of installation and is easily removable to allow first fix of the base. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005 the X-FMPRL Light is available in white or special finishes.

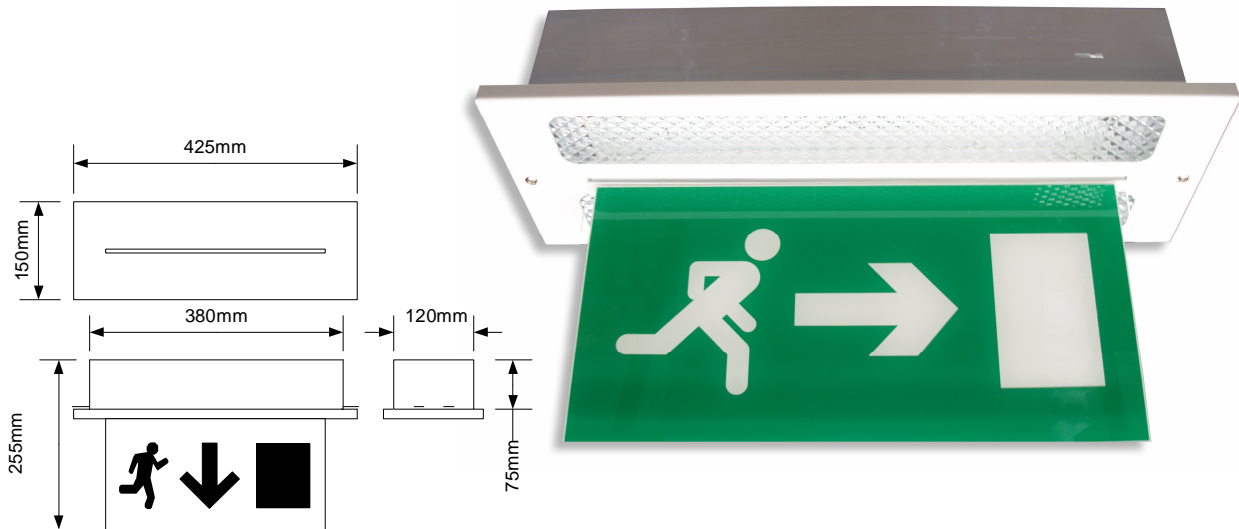

### Typical Applications

- Hotels
- Corridors
- Art Galleries
- Offices

### Features

- Chrome and Gold finishes available
- Recess mount
- Self test
- White high output LED's
- Hinged gear tray
- IP20

Order No	Mode	Lamp Type	Battery	Power Con	Duration	Weight	Output	Dimensions
X-FMPRL3M	Maintained with Self Test	6 Led's	3.6V 4Ah	7VA	3 Hours	1.5Kg	150 Lumens	When unit is installed the blade protrudes 180mm from the ceiling. The bezel is 425mm x 150mm and the legend is 325mm wide (Cut Out 380mm x 120mm)
X-FMPRL3NM	Non Maintained with Self Test	6 Led's	3.6V 4Ah	7VA	3 Hours	1.5Kg	150 Lumens	

NOTE: All exit signs arrow down as standard if other direction is required please specify