
## **TP RANGE**



The TP Light is an attractive low profile, versatile emergency luminaire suitable for internal environments and with the added advantage of being able to take a full size escape route legend. Comprising of a moulded self-extinguishing polycarbonate and fitted with a clear prismatic diffuser, suitable for use on escape routes (850 degree C Hot-Wire test, defined by ICEL). The diffuser is clipped to the base to provide a seal to IP40. The gear tray is easily removable to allow first fix of the base. Cable knockouts are provided in the ends and a BESA entry in the base. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005. Available in white.

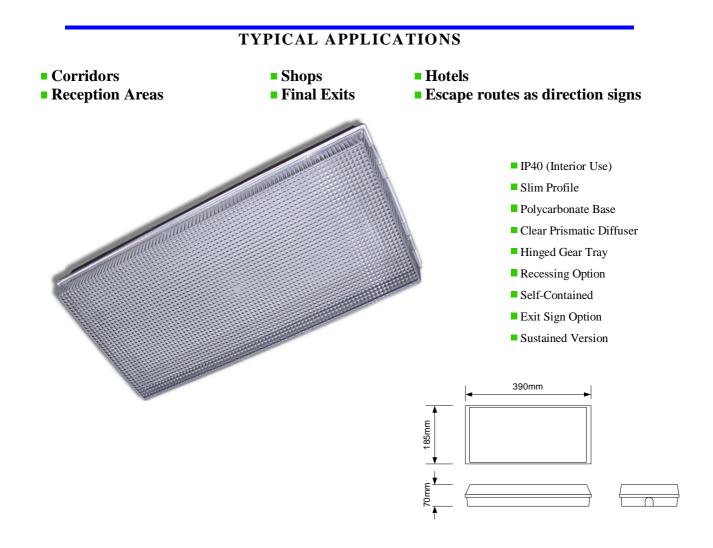

	Mode	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output	Dimensions
TP8NM	Non Maintained	8W T5	8 VA	2.4V 4Ah	3 Hours	1.4 Kg	100 Lumens	
TP8M	Maintained	8W T5	20 VA	2.4V 4Ah	3 Hours	1.75 Kg	100 Lumens	390 x 185 x 70
TP8S	Sustained (Combined)	8W T5 (two of)	20 VA	2.4V 4Ah	3 Hours	1.75 Kg	100 Lumens	390 X 103 X /0
TP8/SL/*	Mains or Slave	8W T5	7 - 20 VA			1.2 - 1.5 Kg	270 Lumens	

Please suffix voltage required i.e. 24, 50, 110, 230
/ST - Self Test