


Securefast ◊ Tête ◊ Colsôn

The **Securefast 600 Series Touch Bar Range** has been certified by an Independent Test House to EN1125 : 2008 and also achieved 1,500,000 cycles (7.5 times the requirement of EN1125)

- Tested to 1,500,000 cycles
- Fire Rated to EN1634-1
- Available as a Single, Two and Three Point unit.
- Category 2 (Less than 100mm Projection),
- Successfully exceeded 240 hours in a salt spray test
- End support available with Hold Back or Micro Switch
- Horizontal Cross Bar ideal for gripping to close the door.
- Electric Release available

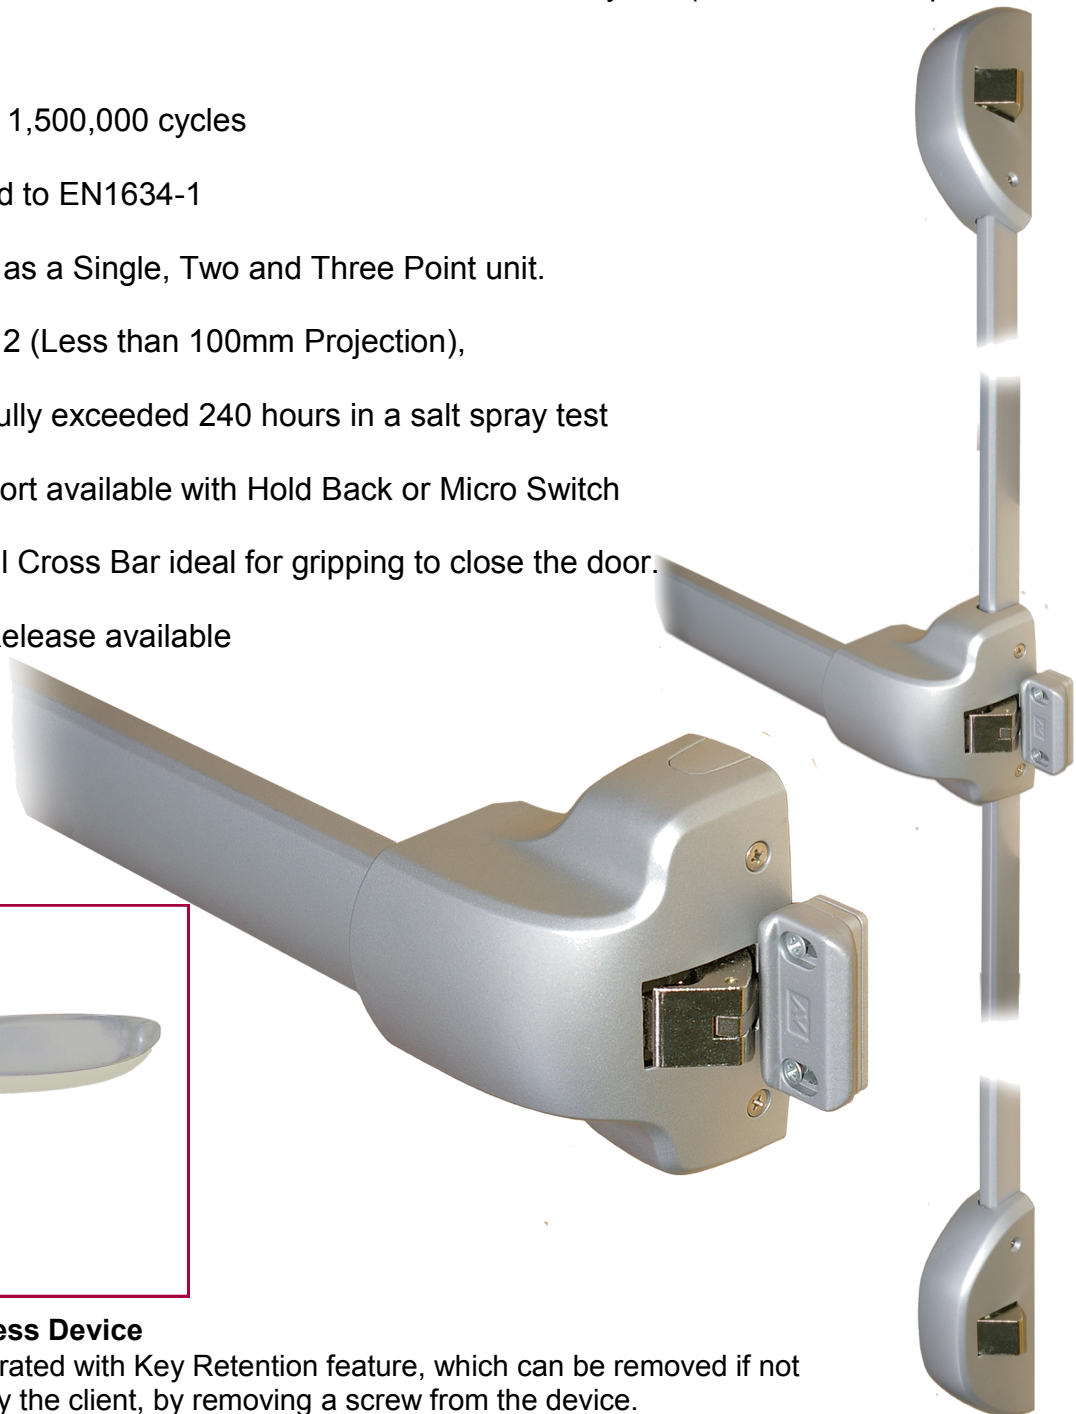

Outside Access Device

- Lever operated with Key Retention feature, which can be removed if not required by the client, by removing a screw from the device.
- Universal, non-handed
- Supplied without a cylinder for customers to be able to use their own cylinder system or a budget cylinder (SEU402) can be supplied by Securefast.
- The 40mm Single Euro Profile Cylinder is held in place by its normal retaining screw, providing easy interchange ability



Contact Securefast Sales Office for details

Tel: +44 (0)1543 501 600

Email : sales@securefast.co.uk

Fax: +44 (0) 1543 501 601
or visit www.securefast.co.uk

Securefast

TECHNICAL DATA

Touch Bar devices

SED601M/SE Touch Bar Latch for doors up to 1240mm wide - Silver finish

SED602VM/SE Touch Bar 2 Point Vertical Pullmans for doors up to 1240mm wide - Silver finish

SED603HM/SE Touch Bar 3 Point Horizontal Pullmans for doors up to 1240mm wide - Silver finish

SED601M/SS Touch Bar Latch for doors up to 1240mm wide - PVD Stainless Steel finish

SED602VM/SS Touch Bar 2 Point Vertical Pullmans for doors up to 1240mm wide -

PVD Stainless Steel finish

SED603HM/SS Touch Bar 3 Point Horizontal Pullmans for doors up to 1240mm wide -

PVD Stainless Steel finish

Outside Access Devices

SED600LEC/SE Outside Access Device with Lever & Cylinder - Silver finish

SED600KNC/SE Outside Access Device with Knob & Cylinder - Silver finish

Locking Mechanism

- Non-handed
- Two Point Locking uses Vertical Pullmans with Anti-Thrust
- Three Point Locking uses Horizontal Pullmans with Anti-thrust on centre latch
- Narrow stile fittings for UPVc, Timber and Steel Doors – 38mm wide fixing plate; ideal for Glass Panelled doors
- Concealed Rods in vertical section

Size

- The cross bar supplied as standard is 1085mm long, which can be cut down to accommodate the door width of 400mm
- The clear opening width of a standard kit will suit door openings up to 1240mm
- The maximum door height that a standard unit can be fitted on is 2450mm.

Finish

- The range is available in a standard Silver and also a PVD Simulated Stainless Steel finish.
- Other finishes are available but would be ordered as specials (delivery 15 Days, with possible carrier costs)



Electric Release

- 12v dc
- Surface mounted to function with Latch Unit
- Powder Coated to match the Panic Hardware
- Spacers provided to accommodate the door frame

Securefast plc

Unit 6 & 7, Cedar Business Centre, Avon Road, Cannock, Staffordshire, WS11 1QJ

Tel (+44) 1543 501 600

Fax (+44)1543 501 601

www.securefast.co.uk

March 2010