


How to Apply A Tamper Seal to a Fire Extinguisher

Equipment required: Tamper seals (colour may vary), scissors, fire extinguisher



1. Separate one tamper seal from the others by pulling it apart.

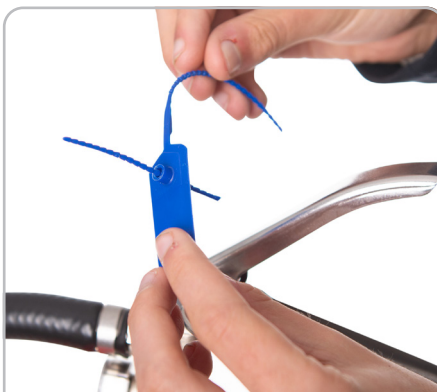

2. If there are any remnants of the old tamper seal, remove and dispose of.



3. Place the new tamper seal behind the handle with the larger end at the top



4. Ensure the side where the hole is sticking out is facing towards you.



5. Loop the thin end under the handle, and up through the circular end of the pin.



6. Thread the thin end through the protruding hole.



7. Pull the thin end through the hole until it is fairly tight to the handle.



8. Use scissors to cut off any excess length on the thin end of the seal.



9. Your tamper seal is now attached. Place extinguisher back on its stand or hook.