



Replacement Instruction Booklet

BRK 600 Series Alarm with Twist-fit Base

Scan for More Information



safelincs.co.uk/replace-brk

ATTENTION:

Replace all alarms in the system together to maintain optimum system operation; failing to do so may compromise interlink performance.


DOC 1586 - V4.0

Important!

easichange[®]

The included 9V battery must be inserted before installing the alarm. Follow the instructions below to fit the battery:

1




Open Alarm

2




Insert Battery

3



Close Alarm


4



Test Alarm


Twist Fit - Replacing Your Alarm

1




Turn the power off to all alarms
in the property

2

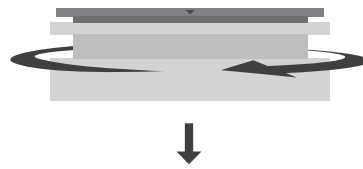


Twist the alarm anticlockwise and
pull away from the ceiling

3



Disconnect the wired plug from the
alarm

4



Connect the wired plug to the
alarm connector


Twist Fit - Replacing Your Alarm

5



Line up the arrow on the new alarm to the arrow on the base plate

6

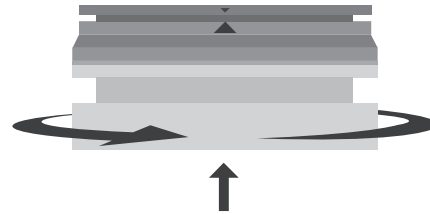

Push the alarm towards the ceiling and twist clockwise until it's secured

ATTENTION:

Replace all alarms in the system together to maintain optimum system operation; failing to do so may compromise interlink performance.