

JALITE Photoline Stairnosing has been designed to complement existing emergency systems or could be used in conjunction with a full photoluminescent evacuation route marking system for escape route illumination.


Local or emergency power failure on stairways could be a fatal hazard for evacuees. Under conditions of total power failure JALITE Photoline Stairnosing will immediately illuminate to help the evacuee to orientate, locate stair edges and risers, and assist the safe evacuation of the premises.

JALITE Photoline Stairnosing requires no electrical connection, is simple to install and requires no special maintenance.

JALITE Photoline Stairnosing requires only normal illumination, e.g. daylight, fluorescent light or standard tungsten filament to activate its performance.

PRODUCT CODE:


SNAL(S)



Straight-Back Nosing.

PRODUCT CODE:


SNAL(R)



Rake-Back Nosing.

SUITABILITY:

Floor coverings:
4.5-6.5mm
Foam-backed vinyls.
Sheet or tiled rubber,
needlecord and
medium-gauge carpets.

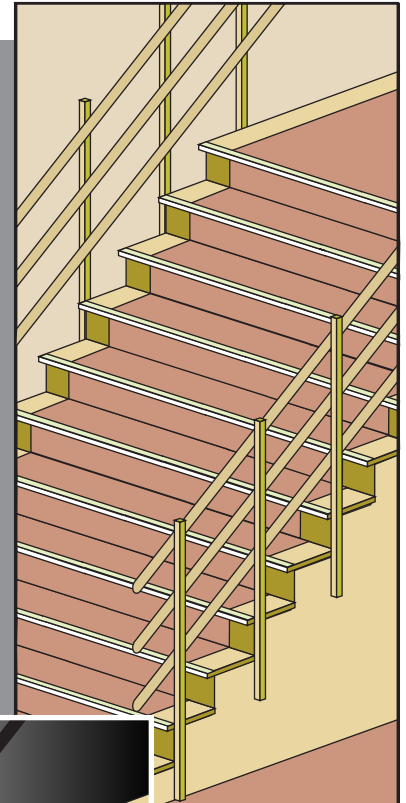


PURPOSE:


Stairnosings are safety edges for steps. They are designed to:-
- provide a safe and secure edge for pedestrians;
- prolong the life of floor coverings;
- make a visible and attractive design feature.
When properly specified and fitted, stairnosings will provide many years of trouble free usage, requiring little or no maintenance.

PREPARATION:

All steps to be fitted should be well constructed, flat and free of paint, dirt and grease and, in the case of wooden stairs, sanded and dust-free. Worn steps must be made good.

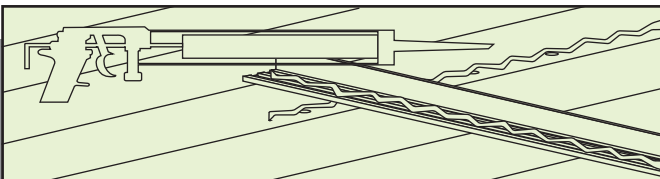


Apply zig-zag bead of adhesive to step and nosing, then press both surfaces together to spread adhesive. Remove nosing and let it stand for 10 - 20 minutes to allow adhesive to cure.

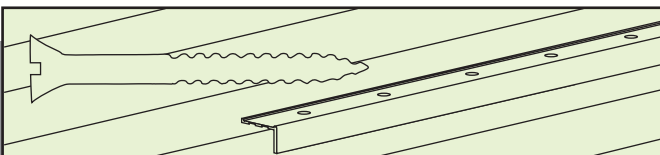

Fit nosing into position and screw down firmly into place. Apply screw top insert plugs with a dab of adhesive to complete the job. Do not walk on the nosing for 24 hours after fitting.

FIXING: With adhesive and screws / mechanical fixings.

MAINTENANCE: Clean with mild detergent solution. Polish channel with soft clean cloth. Replace nosing when worn or loose.

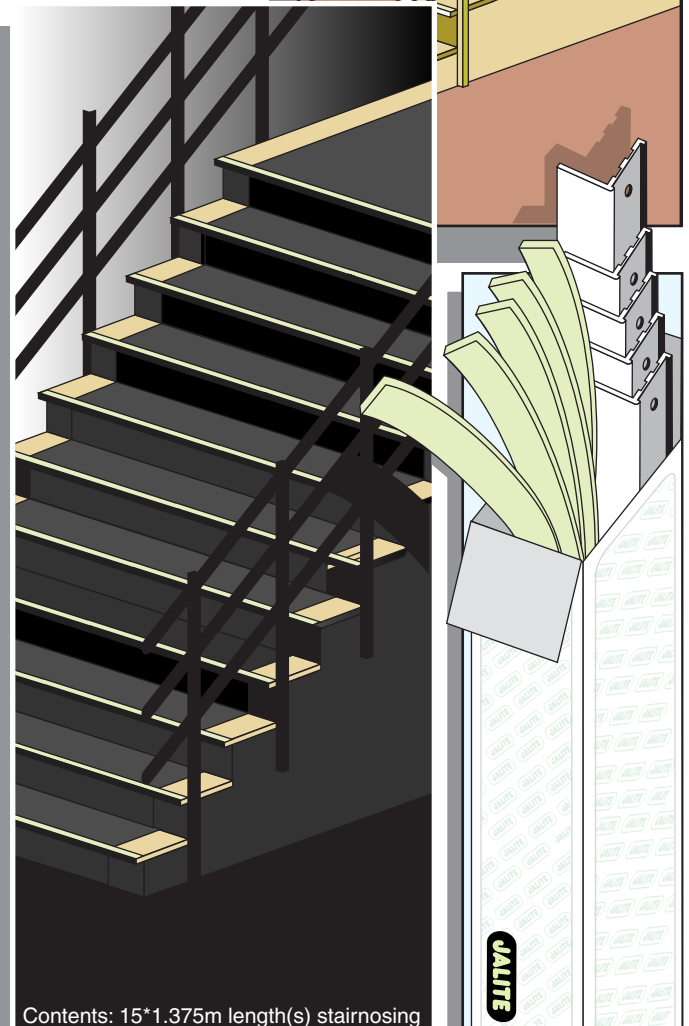

Contents: 15*1.375m length(s) stairnosing