

SLIMLINE LED BULKHEAD

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting



The X-RSL6M light is a self-contained LED high light output, emergency luminaire with the a self-test facility as standard.

- Fitted with a frosted diffuser.
- 6 high output LEDs.
- Designed for use on escape routes - when fitted with ULK.
- Complying with requirements of EN60598-2-22.
- Suitable for incorporation into emergency lighting system complying with BS5266-1:2005.
- X-RSL6M Light can be fitted with universal legend kits (part ULK) making it suitable for use as an sheltered IP42 exit sign.
- White as standard, range of alternative finishes are available.
- Switchable maintained/non maintained as standard.
- Self test - continuously tests battery voltage and operation of LED's

Specification

- IP42 (Outside Sheltered)
- Polycarbonate/ABS Construction
- Frosted Diffuser
- Removable Gear Tray
- Exit Signs
- Self-Test
- 6 LED's
- Semi recess mounting kit available




Options

Options

/LGDL	Clip on suspended legend arrow left
/LGDR	Clip on suspended legend arrow right
/RK	Semi recess Kit
ULK	Universal legend kit

Dimensions

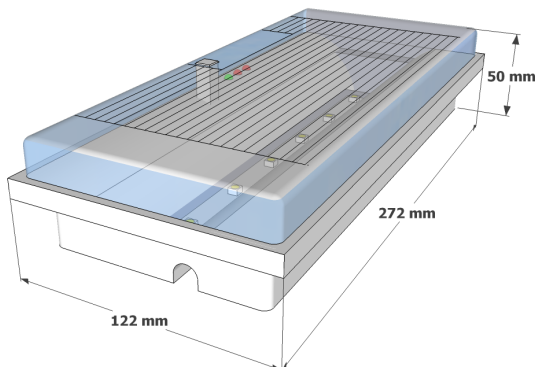

Suitable Applications

- Suitable for all escape routes including final exits (Outside Sheltered)
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight	Output	Emergency Output
X-RSL6M	Maintained	6 CREE LED's	13W	3.6V 3Ah	3 Hours	0.61 Kg	75 Lumens	150 Lumens

Installation Notes

- The diffuser is attached by snap fitting to the base to provide a seal to IP42.
- Gear tray is also snap fitting and fully removable.
- Cable knock-outs are provided in the ends of base

Materials / Finish

- Manufactured in white moulded self-extinguishing polycarbonate base.
- Fitted with a frosted diffuser.

Catalogue Numbers

X-RSL6M

Maintained