


EasyScape Fire Escape Ladder

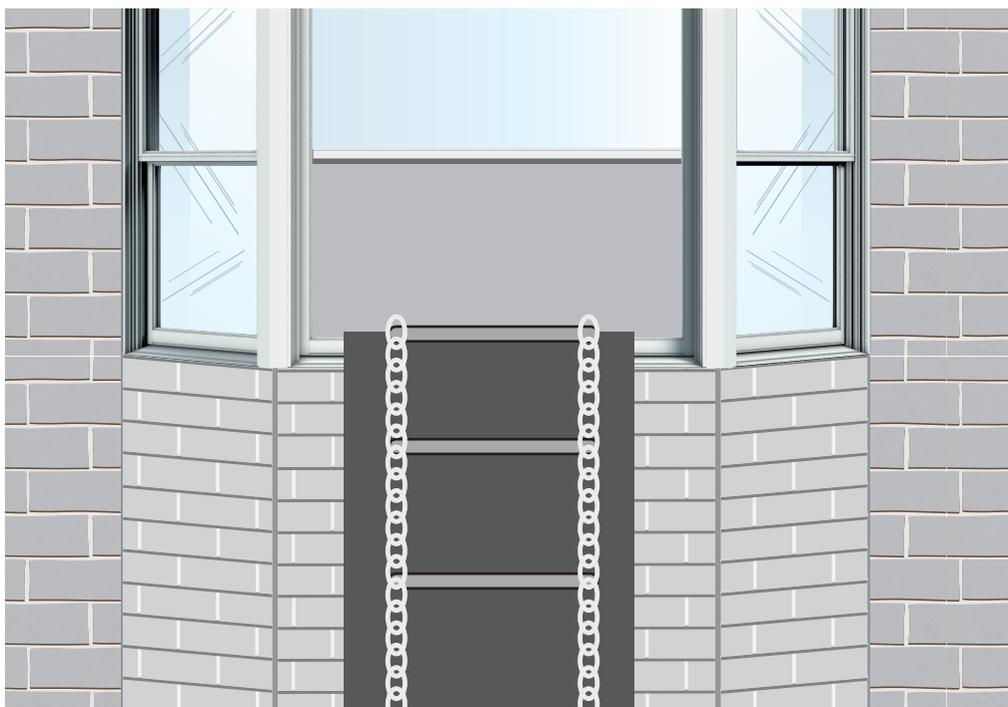

UltraFire

INSTRUCTION MANUAL



ASSEMBLY INSTRUCTIONS



WARNING!

Eyebolts must be installed by a competent person on a structurally sound internal wall before the ladder can be deployed for the first time. Do not fix to an external wall. Do not tamper with or disassemble eyebolt.



1

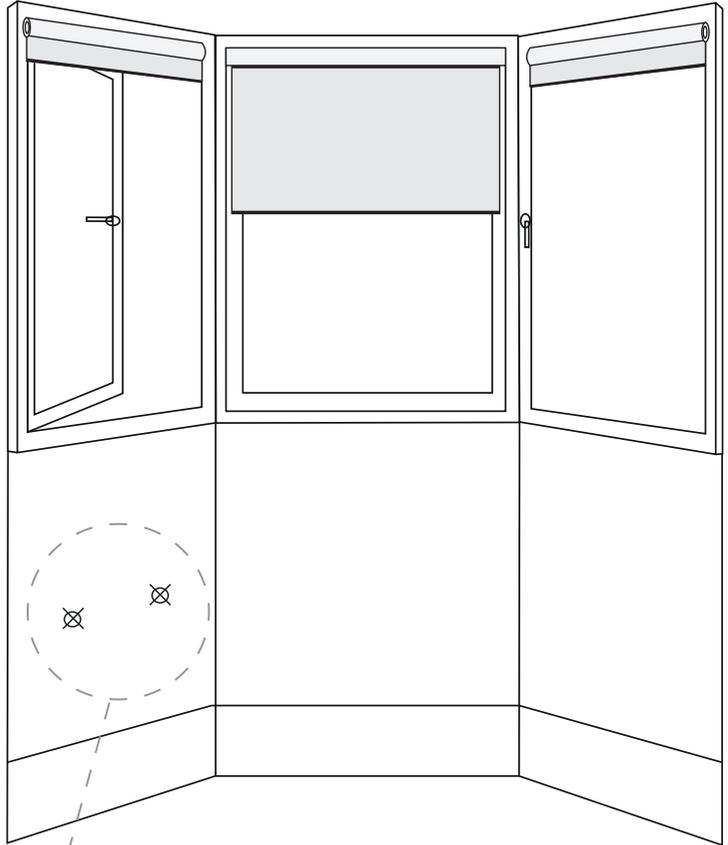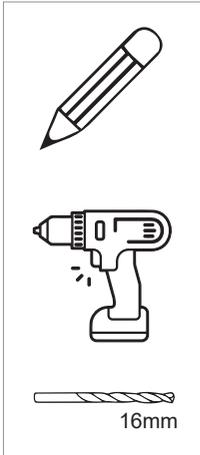


PLEASE NOTE:

Drill only into stone or brick. Eyebolts will not be secure if installed into mortar or wood.


Wooden fixing kits are available separately

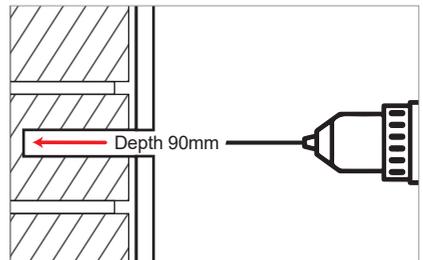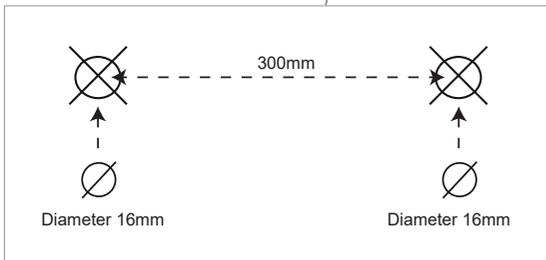


2

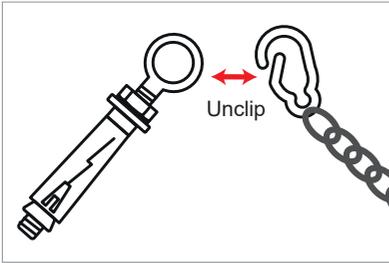

3

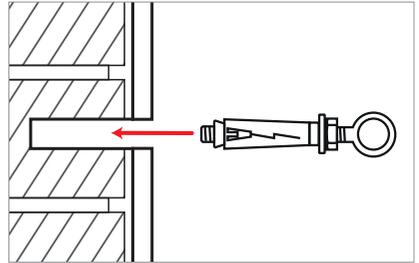

4

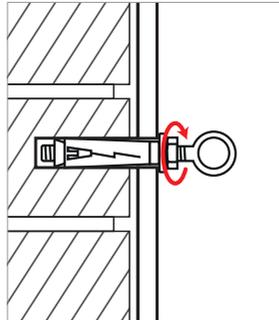


Tighten locking nut on eyebolt with a spanner. Do not over-tighten!

PLEASE NOTE:

The eyebolts should be at 90 degrees to the floor (not parallel) in their final, tightened position.

REPEAT STEPS 2 TO 4 FOR THE SECOND EYEBOLT

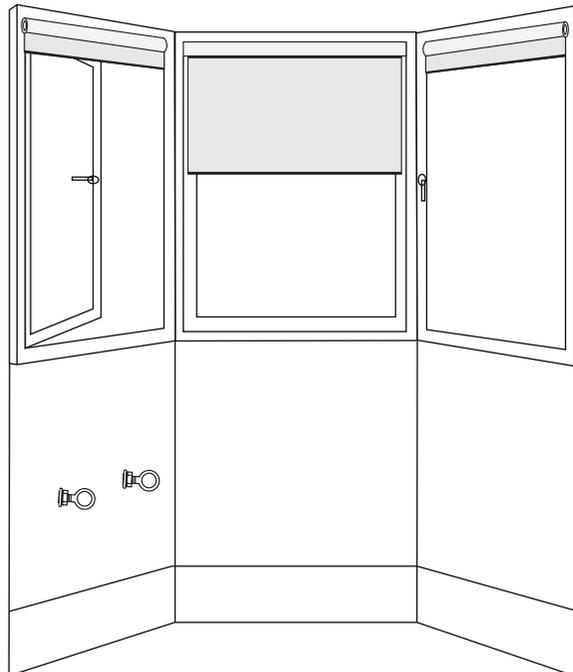




OPERATING INSTRUCTIONS



PLEASE NOTE:


The EasyScape ladder must be stored in a safe and easily accessible location. All potential users should be familiar with the operation of the ladder prior to using it. Only one person (max weight: 350kg) should descend the ladder at any one time.

1

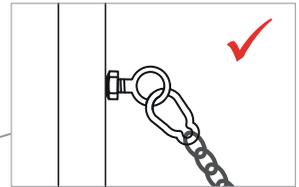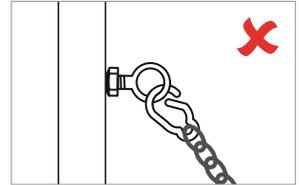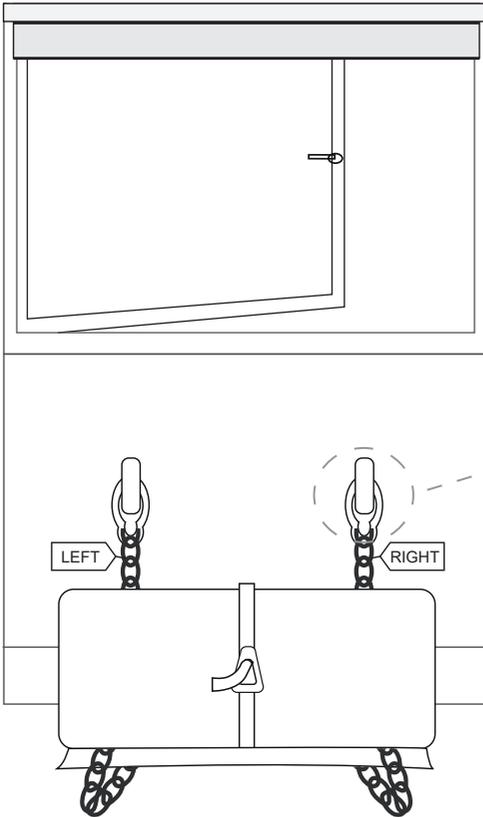


Please Note: Clip carabiner onto the correct eyebolt.

2

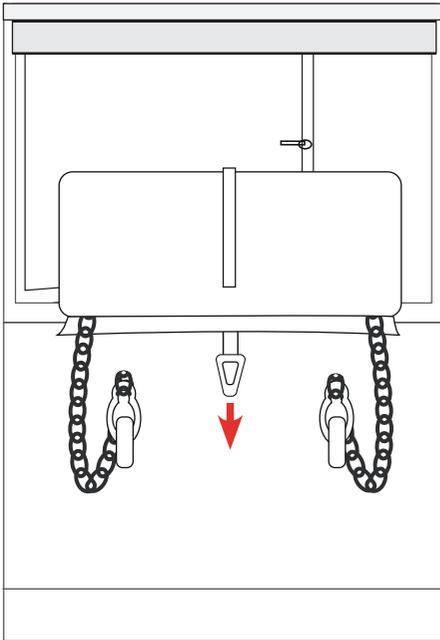


- a) Lift ladder on to window sill
- b) Release the toggle and rope
- c) Push ladder out of the window


3

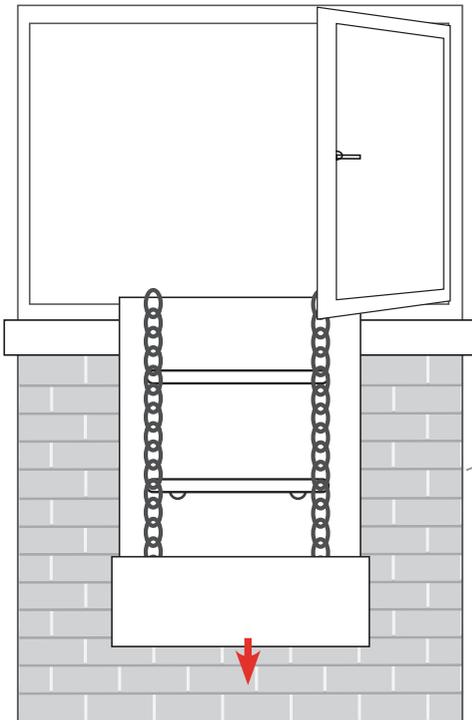

Please Note: Check that the ladder has deployed fully and that the plastic sheeting does not obstruct the rungs.

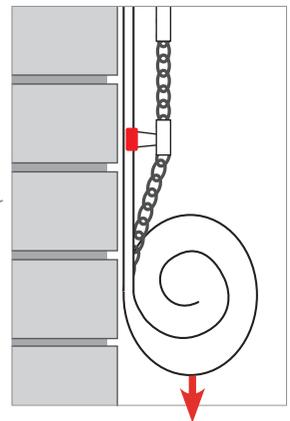

4

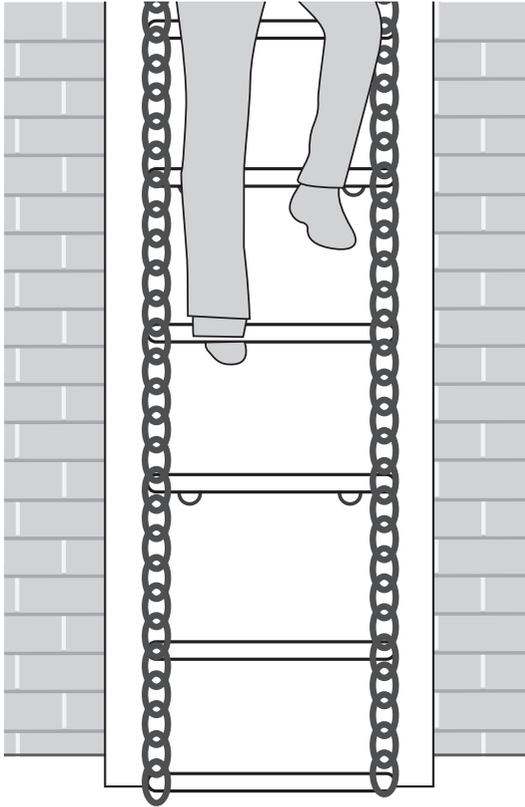

PLEASE NOTE:

Test ladder in a non-emergency situation. Climb from the ground upwards to ensure that the ladder is correctly installed.

Protect your window sill from damage by placing a blanket over the sill first.

Window sills are sometimes glued in place. Do not hold on to the sill **unless you are sure it can hold the weight.**

- a) Straddle the window sill holding on to the window frame at all times.
- b) Place your outer leg onto the nearest rung. Swing your inner leg over the sill and onto a rung of the ladder.
- c) Move your hand hold to the chain and descend the ladder one person at a time.
- d) The first person down the ladder should stabilise it from the bottom to aid the other climbers.

NOTES:

The ladder can be used for angled roofs, but the following precautions should be noted:

1. The stand-offs may not be at the correct angle to the angled roof so particular care should be taken when climbing down to avoid slipping or trapping your fingers.
2. If the angled roof overhangs the wall, particular care must be taken when climbing over this point. The ladder may not be flush to the wall and may therefore sway when in use.
3. The eyebolts must be fitted to a structurally sound wall or beam. Very often, Velux style windows are surrounded by plasterboard only.


PACKING & STORAGE INSTRUCTIONS



WARNING!


Before storing, check ladder and plastic sheet for damage. **Do not re-use the ladder if it is damaged.**

1

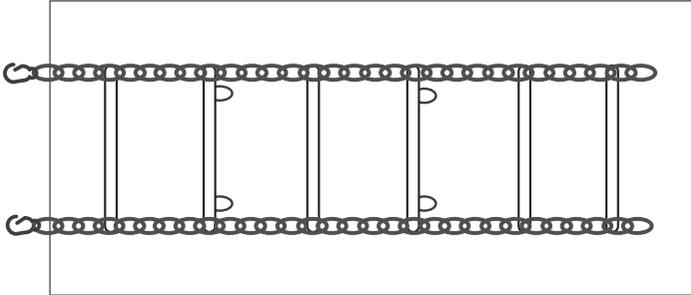


Place ladder flat on the floor to pack.


2

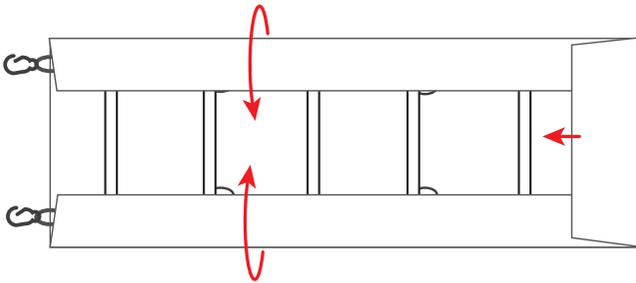


3

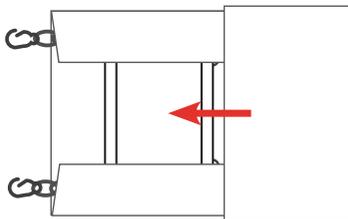

4

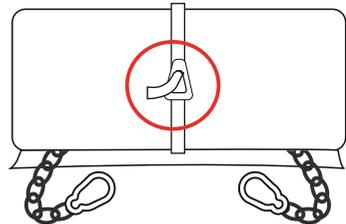

5

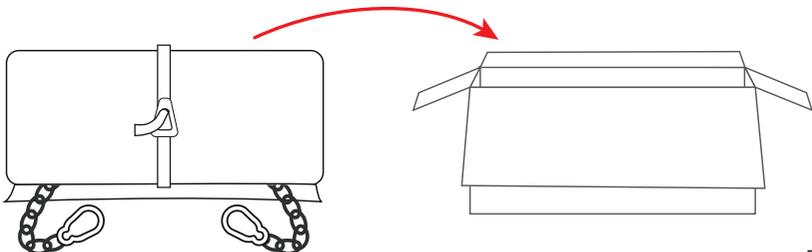

The logo for UltraFire, featuring the word "UltraFire" in white text on a red rectangular background. The "Ultra" is in a bold, sans-serif font, and "Fire" is in a slightly lighter, sans-serif font.

UltraFire

Questions and Contact

If you have any questions, please contact us at:

UltraFire
33 West Street
Alford, Lincolnshire
LN13 9FX

0800 978 8262
support@ultra-fire.co.uk
www.ultra-fire.co.uk

Reviewed: 15/09/2020 Doc 388 V4.0
