

## Touch Bar Panic Exit Hardware - EN1125:2008

Top Pullman latch



Bottom Pullman latch



### SED602

#### Touch Bar Panic Bolt - Two Point Latching

Touch bar activated two point panic bolt with the following features:

- Fire rated to EN1634-1
- Can be cut down on site suitable for doors up to 1240mm wide and up to 2450mm high
- Vertical shoot bolts with aluminium covers can be cut down on-site
- Top and bottom Pullman latches are adjustable for perfect alignment and smooth activation and built in anti-thrust protection
- Non handed, suitable for left or right hand applications
- Suitable for single doors or the active leaf of a rebated double door
- Supplied with easy clean keep for bottom Pullman and surface keep for top Pullman to suit timber and aluminium doors (for steel and uPVC doors see Keep Options on page 17)
- Additional length bar can be supplied for doors up to 1540mm wide

- Optional hold-back available enabling the door to be put into free access (order additional SED600/HB)
- Optional Microswitch concealed in tail end of the unit to integrate with an access control system (order additional SED600/MS)
- 240 hour salt spray corrosion resistance on all finishes


#### Finishes

SE Powder coated silver (as standard)

SC Satin Chrome (stainless steel appearance) available to order

#### Two Point panic latch

Product ref:	Description	EN1125 Classification Code	Fire Door Performance			
			With OAD		Without OAD	
			Timber	Steel	Timber	Steel
SED602/VM/SE	Two point latching - silver	376B1422AA	1hr	TBC	1hr	1hr
SED602/VM/SC	Two point latching - satin chrome	376B1422AA	1hr	TBC	1hr	1hr

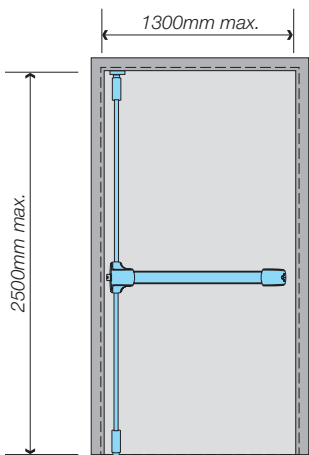

LH application shown

