

SELF - TEST LED EXIT SIGN

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting

This LED exit sign uses high illumination white LED's, in an attractive extruded aluminium housing.




- Manufactured in aluminium with a self-extinguishing legend panel.
- Rated up to IP40.
- Complies with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system.
- Multiple mounting options.
- Self testing exit sign - continuously tests battery voltage and the operation of LED's every 15 days, and every 6 months.
- This is an attractive alternative to a standard suspended or recessed exit sign.

Specification

- IP40
- Self Testing
- Elegant Slim Profile
- Operation Temperature 0°C-40°C
- Operation Humidity up to 95%
- White High Output LEDs



Dimensions

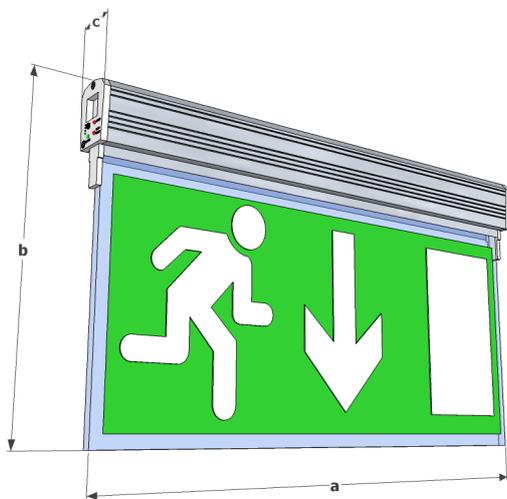

Dimensions (mm)

MPS3L/ST-24	a=290, b=155, c=38
MPS3L/ST-34	a=350, b=225, c=38
MPS3L/ST-44	a=450, b=275, c=38

Options

Options

/L Arrow Left

/R Arrow Right

Note: All exit signs are arrow down as standard please specify other direction if required

Viewing Distance

Viewing Distances

MPS3L/ST-24	18 Metres
MPS3L/ST-34	32 Metres
MPS3L/ST-44	42 Metres

Suitable Applications


- Suitable for escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight	Output	
	MPS3L/ST-24	Maintained	18 LED's	8 W	3.6V 1.5Ah	3 Hours	680g	125 Lumens
	MPS3L/ST-34	Maintained	21 LED's	8.5 W	3.6V 1.5Ah	3 Hours	1.2Kg	125 Lumens
	MPS3L/ST-44	Maintained	24 LED's	9 W	3.6V 1.5Ah	3 Hours	1.5Kg	125 Lumens

Installation Notes

- Unit can be installed in multiple mounting positions - please see below.

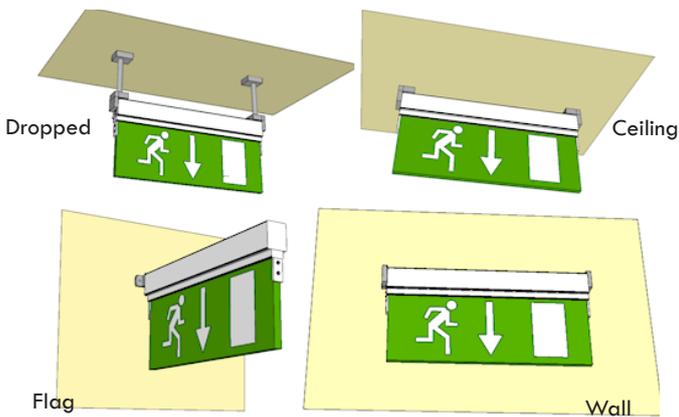

Materials / Finish

- Manufactured in aluminium with a self-extinguishing legend panel.

Catalogue Numbers

MPS3L/ST-24	Maintained	18 LED's
MPS3L/ST-34	Maintained	21 LED's
MPS3L/ST-44	Maintained	24 LED's