


This new FML light uses high illumination white LED's, in a small compact shell. Due to its small drain from the mains power supply and the life span of the LED's and batteries, you can almost forget it's there. It is designed to be recess mounted in walls and ceilings allowing emergency lighting to be provided in a low profile. Comprising of a stove enamelled sheet steel base fitted with a clear prismatic diffuser retained by a white bezel, suitable for use on escape routes (850 degrees C Hot-wire test, defined by ICEL). The diffuser is attached by captive screws and provides a seal to IP20. The gear tray is hinged for ease of installation and is easily removable to allow first fix of the base. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005 the FML Light is available in RAL 9010 as standard or special finishes. Opal diffuser option available to order.

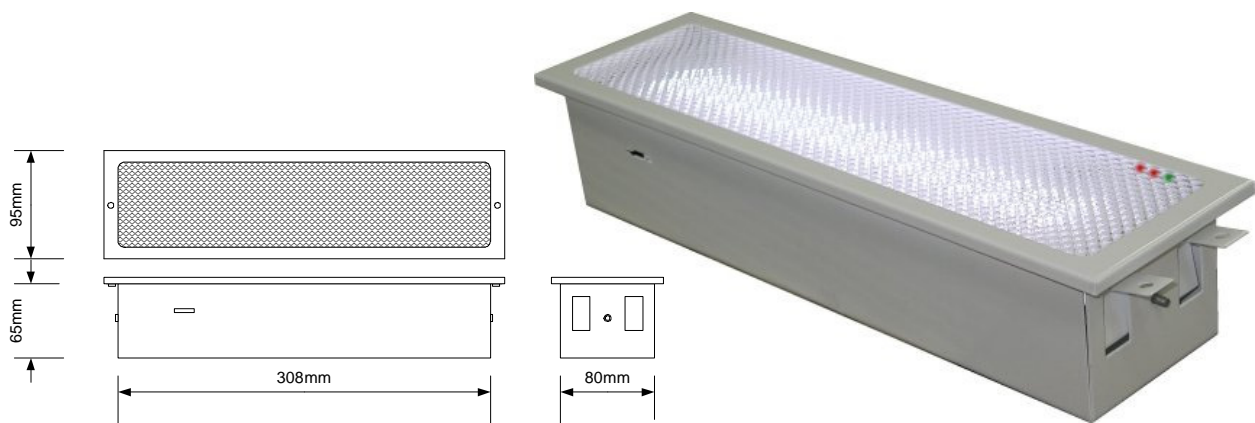

Typical Applications

- ▶ Hotels
- ▶ Corridors
- ▶ Art Galleries
- ▶ Offices

Features

- ▶ Chrome and Gold finishes available
- ▶ Recess mount
- ▶ Self Test 3hr Duration
- ▶ White high output LED's
- ▶ Hinged gear tray
- ▶ IP20

Order No	Mode	Lamp Type	Battery	Power Con	Duration	Weight	Output	Dimensions
FML3M	Maintained with Self Test	32 Led's	3.6V 4Ah	16VA	3 Hours	1.5Kg	100 Lumens	Bezel - 330mm x 95mm (cut out
FML3NM	Non Maintained with Self Test	32 Led's	3.6V 4Ah	16VA	3 Hours	1.5Kg	100 Lumens	308mm x 80mm)

NOTE: All exit signs arrow down as standard if other direction is required please specify