

# 8 WATT BULKHEAD

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail  
Lighting



Recess kit



Test switch

The CS Light is a general purpose, weatherproof, emergency luminaire.

- White self-extinguishing polycarbonate enclosure.
- Fitted with clear Fresnel diffuser.
- IP65 rated unit.
- Complying with requirements of EN60598-2-22.
- Suitable for incorporation into emergency lighting system complying with BS5266-1:2011.
- Passes 850 degrees C Hot-wire test defined by ICEL.
- DALI addressable option available.
- Self testing unit - continuously tests battery voltage and operation of the LED's every 15 days, and every 6 months.
- This bulkhead can be fitted with a universal legend kit (part no. ULK) making it suitable for use as exit signs.
- Readily recessed with the optional recessing flange.
- Wide number of alternative finishes available.
- Switchable, Maintained and Non-Maintained versions available.

## Specification

- White as standard
- IP65 (Weatherproof)
- Polycarbonate/ABS Construction
- Fresnel Diffuser
- Hinged / Removable Gear Tray
- Self-Contained
- Ambient Temperature 0°C to 25°C
- For Internal / External Applications



## Options

### Options

/BK Black base

/HT 40°C ambient

/ST Self test


/TS Test switch

/DALI DALI

/PC Photo Cell

Note: All exit signs are arrow down as standard please specify other direction if required

## Dimensions

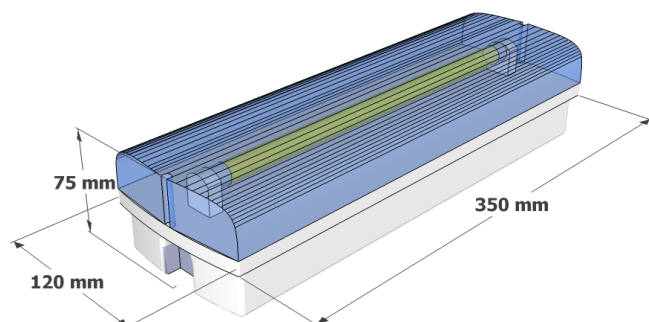

## Suitable Applications

- Suitable for all escape routes including final exits and intersections.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Suitable for exterior applications.

## Technical Specification

	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output
<b>CS8M</b>	8W T5	20 W	2.4V 4Ah Ni-Cd	3 Hours	1.28 Kg	100 Lumens
<b>CS8NM</b>	8W T5	8 W	2.4V 4Ah Ni-Cd	3 Hours	1.10 Kg	100 Lumens
<b>CS8NM/DALI</b>	8W T5	5 W	2.4V 4Ah Ni-Cd	3 Hours	1.05 Kg	108 Lumens
<b>CS8/SL/*</b>	ACDC Slave. * suffix voltage required with 24, 50, 110					
<b>CS8/230/HF</b>	Mains only / Static inverter					

## Installation Notes

- Unit can be recessed.
- The gear tray is hinged and fully removable, for ease of installation.

## Catalogue Numbers

<b>CS8M</b>	20 W
<b>CS8NM</b>	8 W
<b>CS8NM/DALI</b>	5 W
<b>CS8/SL/*</b>	ACDC Slave. * suffix voltage required with 24, 50, 110
<b>CS8/230/HF</b>	Mains only / Static inverter

## Materials / Finish

- Moulded in white self-extinguishing polycarbonate base.
  - Fitted with clear Fresnel diffuser.
- Wide number of alternative finishes available.