



X-SLM LED exit sign is perfect for all interior applications. Designed for installation where discreet emergency lighting is required.

- Manufactured in white finished sheet steel enclosure.
- Fitted polycarbonate exit legend.
- IP20 ingress protection.
- High output LED light source.
- Designed in accordance with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system.
- Self testing exit sign - continuously tests the battery voltage and the operation of the LED's
- Unit can be wired in maintained or non-maintained mode.
- White finish as standard, RAL colours available.



A range of ISO 7010:2011 legends available.

Specification

- 6 CREE LED light source
- IP20 (Interior Use)
- Ultra low profile
- Self-Test 3 hour duration
- Chrome, brass and RAL colour options available.
- Maintained or Non Maintained




Options

Options	
/L	Arrow Left
/R	Arrow Right
/CR	Chrome finish
/BR	Brass finish
/BK	Black finish
/DALI	DALI
/GRD	Wire protective guard

Note: All exit signs are arrow down as standard please specify other direction if required

Dimensions

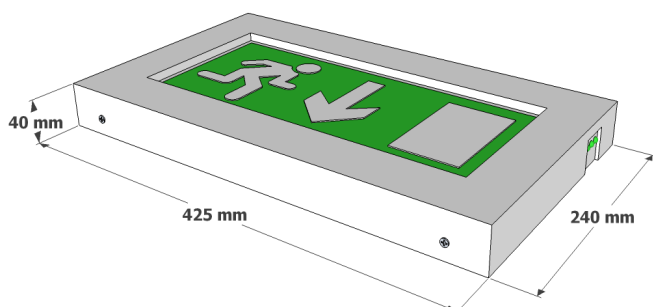

Viewing Distance

Viewing Distances	30 Metres
--------------------------	-----------

Suitable Applications

- Suitable for above doorway escape route marking.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output
X-SLM6M	Maintained	6 CREE LED's	7 VA	3.6V 3Ah Ni-Cd	3 Hours	3.2 Kg	150 Lumens

Installation Notes

- Wall mounted unit.
- Unit can be wired in maintained or non-maintained mode.

Materials / Finish

- Manufactured in white finished sheet steel with a polycarbonate exit legend.
- RAL colour options available.

Catalogue Numbers

X-SLM6M

Maintained