

# 8 WATT EXIT SIGN

The ES Light is a general purpose, cost-effective wall mounted emergency escape route sign.


Comprising a white, stove-enamelled, zintec-coated sheet steel base and fitted with a self-extinguishing legend panel, the ES Light is designed for use on escape routes. It conforms to the 850°C hot-wire test, as defined by ICEL.

The ES Light has cable knockouts, which are provided in the sides and the top. Complying with the requirements of EN60598-2-22 the ES Light is also suitable for incorporation into an emergency lighting system complying with BS5266-1:2011. With flexibility in mind, choose from a wide number of alternative finishes, including British Standard or RAL colour, plus brass & chrome. Switchable, Maintained, Non-Maintained.



Viewing Distances 34 Metres

Model	Mode	Lamp Type	Power Con	Battery	Duration	Weight
ES8NM	Non Maintained	8W T5	8 W	2.4V 4Ah	3 Hours	1.91 Kg
ES8M	Maintained	8W T5	20 W	2.4V 4Ah	3 Hours	2.08 Kg
ES8/SL/*	ACDC Slave. * suffix voltage required with 24, 50, 110					
ES8/230/HF	Mains only / Static inverter					

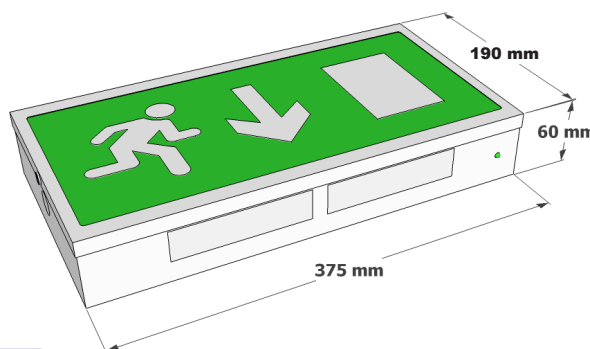

## Options

/BR	Brass finish
/CR	Chrome finish
/L	Arrow left
/R	Arrow right
/ST	Self test
/TS	Test switch
/DALI	DALI
/HO	Hold off relay

Note: All exit signs are arrow down as standard please specify other direction if required

- IP20 Interior Use
- Escape Route Sign
- Downlight Facility
- Choice of Legend
- Can be Ceiling Mounted
- Colour Options
- Brass or Chrome Versions
- Self-Contained
- Ambient Temp 0°C to 25°C