

8 WATT EXIT SIGN

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting



The ES Light is a general purpose, cost-effective wall mounted emergency escape route sign.

- The ES Light is a general purpose, cost-effective wall mounted emergency escape route sign.
- White, stove-enamelled, zintec-coated sheet steel base.
- Self-extinguishing polycarbonate legend panel.
- Complying with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Passes the 850°C hot-wire test, as defined by ICCEL.
- Wide number of alternative finishes, including British Standard or RAL colour, plus brass & chrome.
- Switchable, Maintained & Non-Maintained versions available.

Specification

- IP20 Interior Use
- Escape Route Sign
- Downlight Facility
- Choice of Legend
- 24, 50, 110V ACDC options available
- Self-Contained
- Ambient Temp 0°C to 25°C




Options

Options

/CIN	Black legend
/CM	Ceiling mount
/FM	Flag mount
/BR	Brass finish
/CR	Chrome finish
/L	Arrow left
/R	Arrow right
/U	Arrow up
/D	Arrow down
/ST	Self test
/TS	Test switch
/DALI	DALI
/NHS	NHS legend

Dimensions

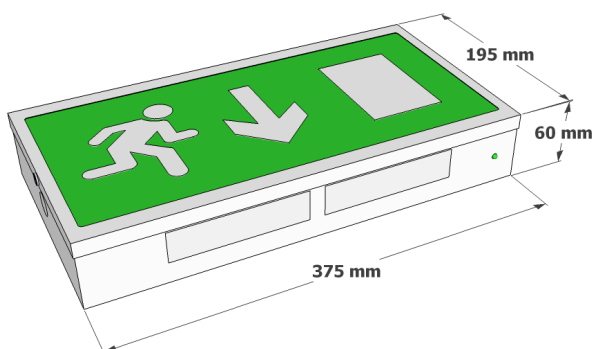

Viewing Distance

Viewing Distances

34 Metres

Suitable Applications

- Suitable for use on escape routes and inside final exits.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight
ES8NM	Non Maintained	8W T5	8 W	2.4V 4Ah	3 Hours	1.91 Kg
ES8M	Maintained	8W T5	20 W	2.4V 4Ah	3 Hours	2.08 Kg
ES8/SL/*	ACDC Slave. * suffix voltage required with 24, 50, 110					
ES8/230/HF	Mains only / Static inverter					

Installation Notes

- Wall mounted as standard.
- Ceiling mounting option available.
- Flag mounting option available
- Cable knockouts provided on sides and top of base for ease of installation.

Materials / Finish

- White, stove-enamelled, zintec-coated sheet steel base.
- Self-extinguishing polycarbonate legend panel.
- Wide number of alternative finishes, including British Standard & RAL colour, or brass & chrome.

Catalogue Numbers

ES8NM	Non Maintained
ES8M	Maintained
ES8/SL/*	ACDC Slave. * suffix voltage required with 24, 50, 110
ES8/230/HF	Mains only / Static inverter