

8 WATT DOUBLE SIDED EXIT SIGN

The EDS light is a general purpose, double-sided interior ceiling mounted sign for use at an intersection on an emergency escape route.




Comprising a white, stove-enamelled, zintec-coated sheet steel base fitted with a self extinguishing legend panel, the EDS Light is designed for use on escape routes. It passes the 850°C hot-wire test, as defined by ICEL.

The EDS light has a cable knockout, provided in the top. It complies with the requirements of EN60598-2-22 and is suitable for incorporation into an emergency lighting system complying with BS5266-1:2011. With flexibility in mind a full range of alternative finishes are available including any British Standard or RAL colour. Switchable, Maintained and Non-Maintained versions available.

Viewing Distance 34 Metres

Model	Mode	Lamp Type	Power Con	Battery	Duration	Weight
EDS8NM	Non Maintained	8W T5	8 VA	2.4V 4Ah	3 Hours	2.18 Kg
EDS8M	Maintained	8W T5	20 VA	2.4V 4Ah	3 Hours	2.35 Kg
EDS8/SL/*	ACDC Slave. * suffix voltage required with 24, 50, 110					
EDS8/230/HF	Mains only / Static inverter					

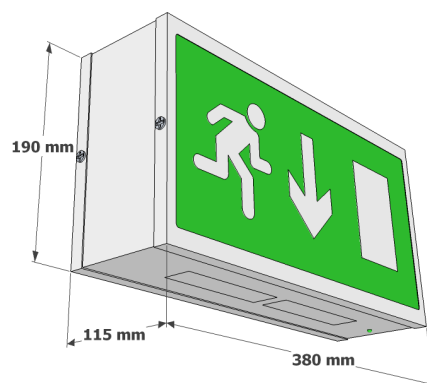

- IP20 (Interior Use)
- Escape Route Sign
- Downlight Facility
- Choice of Legend
- Ceiling Mounted
- Colour Options
- Self - Contained

Options

/BR	Brass finish
/CR	Chrome finish
/LR	Arrow left / right
/ST	Self test
/TS	Test switch
/DALI	DALI

Note: All exit signs are arrow down as standard please specify other direction if required