

8 WATT CHAIN SUSPENDED EXIT SIGN

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting



The MP Light is a decorative, chain suspended, edge-illuminated escape route and direction sign.

- Manufactured with a white finished base and suspended gear enclosure.
- Designed for chain suspension - chrome chain provided.
- Designed in accordance with requirements of EN60598-2-22.
- Suitable for incorporation into emergency lighting system complying with BS5266-1:2011.
- The MP Light is white as standard and available in alternative finishes including British Standard, RAL colour, black, polished brass, chrome and satin finishes.
- Switchable, Maintained and Non-Maintained versions available.

Specification

- IP20 (Interior Use)
- Ceiling mounted chrome chain
- White as standard
- Chrome and Polished Brass options available.



Options

Options

/BR Brass finish

/CR Chrome finish

/LR Arrow Left / Arrow Right


/DS Double sided legend

/ST Self test

/DALI DALI

Note: All exit signs are arrow down as standard please specify other direction if required

Dimensions

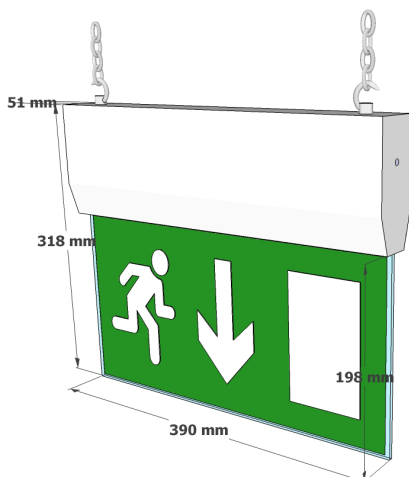

Viewing Distance

Viewing Distances

37 Metres

Suitable Applications

- Suitable for use in Shopping centres, Hotels, Commercial Offices,
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output
MP8NM	Non Maintained	8W T5	8 W	2.4V 4Ah	3 Hours	3.03 Kg	100 Lumes
MP8M	Maintained	8W T5	20 W	2.4V 4Ah	3 Hours	3.20 Kg	100 Lumens
MP8/SL	ACDC Slave. * suffix voltage required with 24, 50, 110						
MP8/230/HF	Mains only / Static inverter						

Installation Notes

- Ceiling mounted chain suspended unit.

Materials / Finish

- Base white finish as standard.
- Chrome chain.
- Available in alternative finishes including British Standard, RAL colour, black, polished brass, chrome and satin finishes.

Catalogue Numbers

MP8NM	Non Maintained
MP8M	Maintained
MP8/SL/*	ACDC Slave. * suffix voltage required with 24, 50, 110
MP8/230/HF	Mains only / Static inverter