


The ESS Light is an attractively designed, emergency escape route sign suitable for all interior applications. The convex front and drilled side and bottom faces makes for an eye-catching alternative. Comprising of a white stove enamelled, zintec coated sheet steel base fitted with a self extinguishing legend panel (850 degree C Hot-wire test, defined by ICEL), suitable for use on escape routes. The ESS Light has a cable knockout situated on the back. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005. The ESS Light can be fitted with legends complying with the Health and Safety signs directive of 1996, while for extensions a full range of BS5499 legends remain available. With flexibility in mind a full range of alternative finishes are available including any British Standard or RAL colour.



- IP20 Interior Use
- Escape Route Sign
- Downlight & Sidelight Facility
- Choice of Legend
- Colour Options Available
- Central Battery Versions
- Self-Contained

TYPICAL APPLICATIONS

- Offices
- Show rooms
- Hotels/Public Houses
- Shops/Shopping complexes
- Inside Final Exit

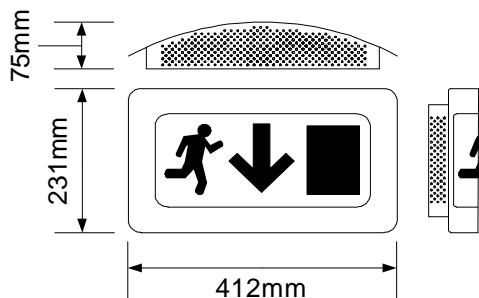

	Mode	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output	Dimensions
ESS8NM	Non Maintained	8W T5	8 VA	2.4V 4Ah	3 Hours	1.65 Kg	100 Lumens	412 x 231 x 75
ESS8M	Maintained	8W T5	20 VA	2.4V 4Ah	3 Hours	2 Kg	100 Lumens	
ESS8/SL/*	Mains or Slave	8W T5	7 - 20 VA			1.5 - 1.8 Kg	270 Lumens	

Please suffix voltage required i.e. 24, 50, 110, 230

Suffix part number with

- /L - Left Arrow
- /R - Right Arrow
- /BR - Brass finish
- /CR - Chrome finish
- /ST - Self Test

NOTE: All exit signs arrow down as standard if other direction is required please specify