


A quality decorative luminaire with looks to please architects and designers. The ER Light offers a cost-effective emergency lighting and mains lighting combination, and is ideal for areas where higher light levels are required.

- Comprising of a moulded self extinguishing polycarbonate base fitted with a clear diffuser.
- Suitable for use on escape routes
- Passes 850 degrees C Hot-Wire test, defined by ICEL.
- Rated IP65.
- Complies with the requirements of EN60598-2-22
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Available in a wide number of alternative finishes, including British Standard or RAL colours.
- Available in a full range of light colour temperatures.

Specification


- IP65
- Polycarbonate Base
- Clear or Opal Diffuser
- High Light Output
- Colour temperature options
- Self-Contained
- High switching PIR compatibility



Options

Options	
/BK	Black base
/OPAL	Opal diffuser
/MIC	Microwave Sensor
/ST	Self Test
/DIM	Dimmable

Dimensions

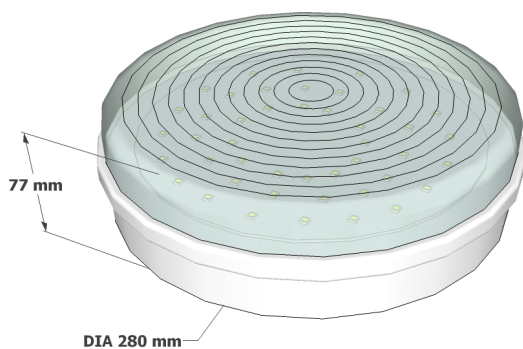

Suitable Applications

- Suitable for all escape routes including final exits and intersections.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Battery	Power Con	Weight	Output	Emerg Output
ER-18/LED/230	-	17W	2.00 Kg	2100 Lumens	-
ER-18/LED/EM3	Ni-Cd	18W	2.10 Kg	2100 Lumens	144 Lumens

Installation Notes

- Diffuser is screw fit and can be gasketted to base to provide seal up to IP65.
- The gear tray is easily removable to allow first fix of the base.
- Suitable for rear BESA entry or 20mm side conduit entries.

Materials / Finish

- Moulded self extinguishing polycarbonate base
- Clear diffuser
- Finished in white as standard
- Available in a wide number of alternative finishes, including British Standard or RAL colours.
- Also available in a full range of light colour temperatures.

Catalogue Numbers

ER-18/LED/230	-	17W
ER-18/LED/EM3	Ni-Cd	18W