

A quality decorative luminaire with sympathetic looks to please architects and designers, the XL demonstrates that emergency lighting need no longer be a compromise. A matching mains version for either wall or ceiling installations enhances the offer.



- White, stove-enamelled spun steel base.
- Fitted with an elegantly shaped polycarbonate opal diffuser.
- XL Light is designed for use on escape routes.
- 850°C hot-wire test, as defined by ICEL.
- The diffuser is a snap fit and provides a seal to IP20.
- A BESA entry is in the base.
- Complying with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- The XL Light effectively combines emergency lighting and mains lighting.
- In white as standard - available in a wide number of alternative finishes, including British Standard or RAL colour, brass and chrome.
- Switchable, maintained, non maintained, mains and sustained versions available.

Specification


- IP20 (Interior Use)
- Circular – 425mm
- Opal or Prismatic Diffuser
- High Light Output
- Colour Options
- Self-Contained
- High Frequency



Options

Options	
/CR	Chrome version
/SC	Satin chrome version
/BR	Brass version
/HO	Hold off relay
/MS	Microwave occupancy sensor
/ST	Self test
XL/BEZ	Semi recessing kit
/DALI	DALI

Dimensions

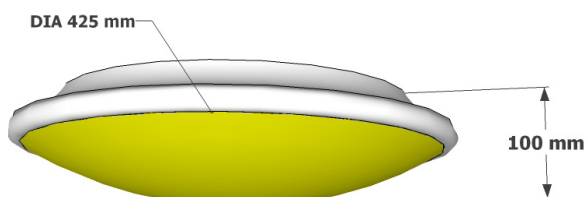

425 & 525 diameters available

Suitable Applications

- Suitable for all escape routes and intersections.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Lamp Type	Power Con	Battery	Duration	Weight	Mains Output	Emerg Output
XL28/230/425	28W 2D	28.7W	-	-	1.49 Kg	2050 Lumens	-
XL28M/425	28W 2D	29W	3.6V 4Ah	3 Hours	1.84 Kg	1845 Lumens	185 Lumens

Installation Notes

- Snap fit diffuser.
- BESA entry is provided in base.

Materials / Finish

- White, stove-enamelled spun steel base.
- Polycarbonate opal diffuser.
- Alternative finishes - British Standard or RAL colour, brass and chrome.

Catalogue Numbers

XL28/230/425	28W 2D	28.7W
XL28M/425	28W 2D	29W