

Product Data Sheet

Astro Coat - Spray Grade

Revision 3 - July 2018



Astro Coat - Spray Grade

Ablative Coating

- CE Marked, UL-EU Listed & Certifire Approval.
- Fire Resistance Testing to EN 1366-3 EI60, EI 90, EI 120
- Fire Classification to EN 13501-2
- Fire Resistance Testing to BS 476 240 minutes
- Flexibility and LOI tested –ASTM D522 & ISO 4589-2:1996
- Air Permeability testing to EN 1026 to 600Pa.
- Acoustic Isolation testing to EN 10140 to 63dB.
- Remains flexible between -5°C to +70°C.
- Easy to use fibre free coating.
- Suitable for large openings in walls and floors with additional supports.
- Life expectancy of over 25 years.
- Flexible and water resistant.
- Contributes to Green Building.



Product Description

Astro Coat is a water-based, acrylic, ablative coating with excellent fire, water, air permeability and elastomeric properties.

It prevents the passage of fire, smoke, air and sound between fire rated compartments and has been tested in block wall, concrete, masonry, plasterboard partition, composite panel, durasteel wall and concrete floors.


Fire protects service penetration openings containing metallic pipes, cables, cable trays, heating & ventilation ducts and trunking. Can be used to coat service insulation as part of the sealing system.

At normal temperatures the coating remains flexible to permit thermal and mechanical movement of services and the building structure. (If you need a very flexible coating see FLEXI-COAT).

Astro Coat is a thinner formulation for use with ASTRO BATT fire board, to seal the edges around the services and between the substrate and the batt before installation. Application is by spray, or brush or pouring applications. (Trowel Grade is also available).

Suitable for large openings in walls and floors with additional supports.

Fire Resistant testing to EN 1366-3 - EI 60, EI 90, EI 120, BS 476 - 240mins.

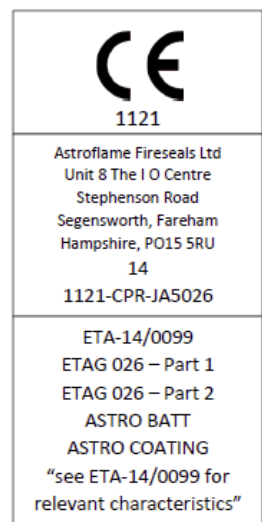

Properties & Specification

Description	Water based flexible acrylic coating
Colour	White
Specific Gravity	1.25 – 1.3 g/cm ³
Fire Resistance	EN 1366-3 - EI 60, EI 90, EI 120, BS 476 240mins
Insulation	EN 1366-3 120mins
Classification	EN 13501-2
Acoustic Insulation	EN 10140 49dB when installed with 50mm Astro Batt. EN 10140 63dB when installed with 2 x 50mm Astrol Batts & PB insert.
Air Permeability	600 Pa EN 1026 - 100Pa 1.8/1.4 m ³ /h/m ²
Shelf Life	12 Months
Cure Rate	0.5mm per day at 50% relative humidity 23°C
Tack Free	6 hrs at 23°C, 50% RH
Application Temperature	+0°C to +30°C
Coating Thickness	1mm Nominal, wet coating thickness
LOI	26.7 ISO 4589-2:1996

Product Availability

Astro Coat - Spray Grade - Sold per 5 Kilo Tub.

Product Code

Product Description

AFBCOAT5L

Astro Coat - Spray Grade

Compliance

Astro Coat is manufactured in the EU, meeting the highest quality standard in compliance to ISO EN 9001.
For fire test certification and Technical advise contact Astroflame technical department.

To Order & Specify

Please contact us and quote the following information - Quantity / Product Code / Product Description
Typical example:- 10 / AFBCOAT5L / Astro Coat

>> Tel: [01329 844 500](tel:01329844500) or >> Email: sales@astroflame.com

Installation

Please see installation sheet - This can be requested from our sales team T: [01329 844 500](tel:01329844500)
or E: sales@astroflame.com

Health and Safety

Please see (SDS) Safety Data sheet - This can be requested from our sales team T: [01329 844 500](tel:01329844500)
or E: sales@astroflame.com

Fire Test or Assessment Reports

Low VOC (air quality).
No Power Tools required for installation (no energy source required).
Dust free.
No water pollution.
Smoke and Air Tightness.
Water Tightness.
Noise Reduction.
Thermal Insulation.
Recycling of Packaging.
Avoidance of Air Filtration.
Does not emit halogenated by-products.
Life cycle of over 25 years.

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.