


## **EVACUATOR DEFENDER**

Thank you for choosing the new Evacuator Defender. This new economical model offers the ultimate protection and is available in four models, push button, push button with strobe, break glass call point and break glass call point with strobe.


- 9v Cell operation
- Reset-able Break glass feature
- Bright xenon strobe light
- Stylish bespoke moulded ABS case
- Push Button or Break Glass model
- Multilink option

### **Installing the Unit**

1. Please separate the front cover from the back plate by removing the two chrome screws and then site the back of the unit on a wall high enough to be visible and well away from any obstructions. **IMPORTANT (MOUNT WITH THE SIREN FACING DOWN)**
2. Mark out the mounting holes using the four washers factory fixed on the unit. Drill and fix the back plate using suitable fixings. Once fitted to the wall, post etc install the two PP3 batteries into the clips
3. Now clip the 4 pin male multiplug connector from the front cover into the 4 pin female multiplug connector on the back plate (**please note that this will only fit one way**)
4. Place front cover over the back plate and fix back into position using the fixing screws on the top and bottom of the unit remembering not to over tighten, the unit is now ready for use.
5. Please test daily or in accordance with your Risk Assessment

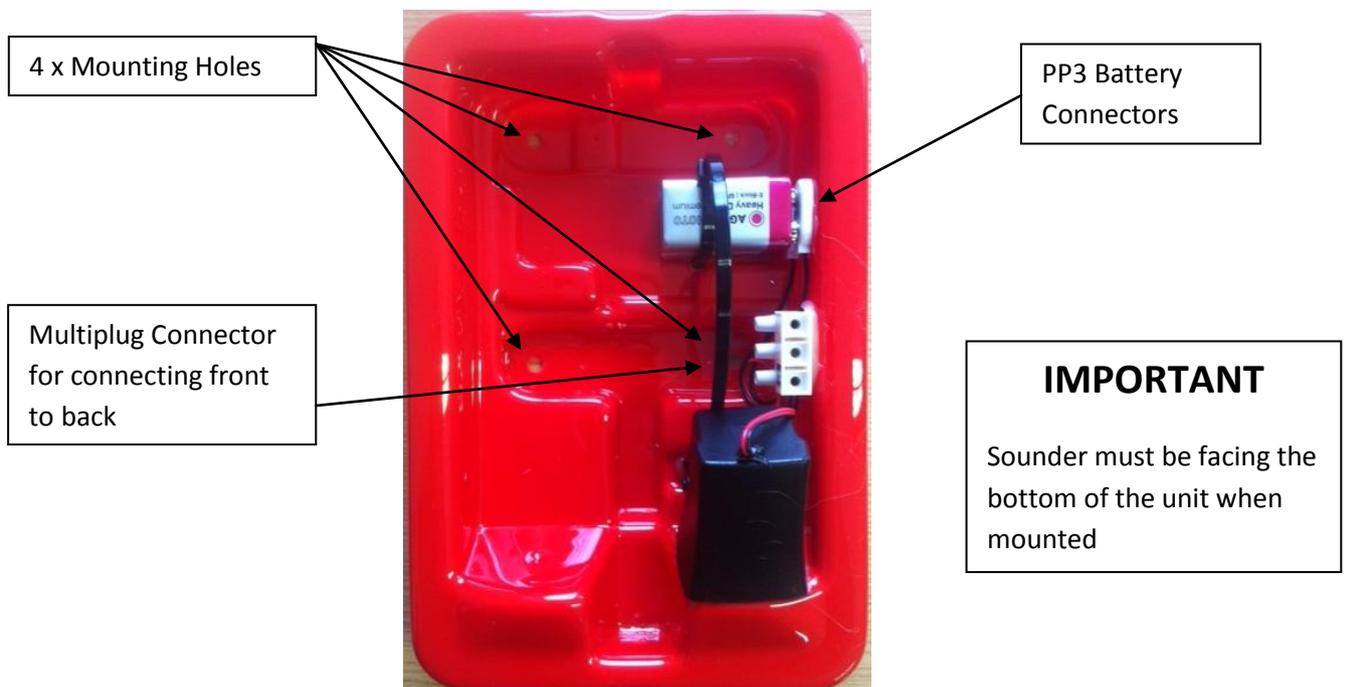

## Linking the Evacuator Defender

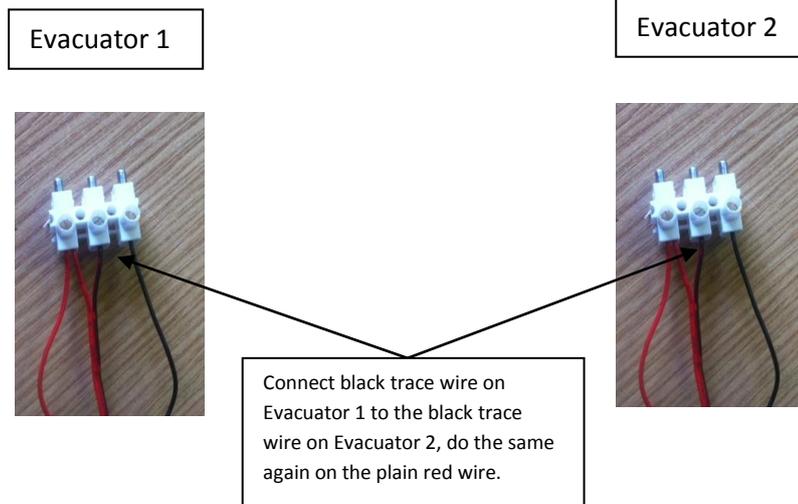

This linking method can be used on upto 30 devices

**Please note:** Use a traceable two core bellwire for linking, for extra protection you can use two core FP rated cable.