

Product Data Sheet

Astro Aluminium Door Edge Guard

Revision 6 - 15th January 2020




Astro Aluminium Door Edge Guard

Intumescent Door Edge Guards


- Satin Anodised Aluminium (SAA) or any RAL colours to match décor.
- Fire tested to BS476 Part: 20 & 22 for 30-60 minutes and EN1634 to 30 mins.
- Eliminate the need for repetitive maintenance.
- Impact protection for both single & double fire doors.
- Suits new & existing fire doors.
- Available with a flat or rounded edge and in various widths to suit any door edge. Also available in PVC.
- New build or refurbishment.
- Ideal for use in Healthcare, Retail, Schools and Commercial/Public areas.
- Length 2100mm or 2500mm.
- Single or double door configuration.



DEGF Square Profile

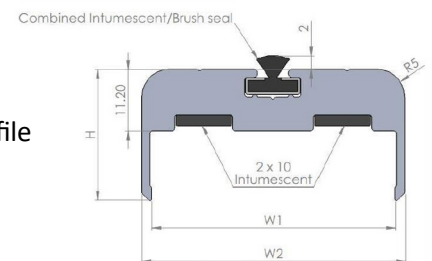

DEGR Rounded Profile

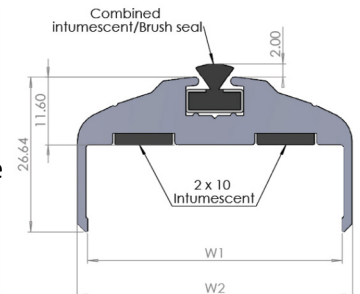

Product Description

Doors in hospitals suffer more than most from wear and tear resulting from high traffic levels and impact damage yet any door in a commercial or industrial building is likely to suffer from this loss of integrity.

With constant trolley and wheelchair traffic it is the leading edge of the door that suffers most from 'porter damage' which not only results in general damage to the door but also possible loss of the fire integrity of the door.

Astroflame have overcome this problem with their range of Fire rated Door Edge Guards which are available in various sizes from 44– 55mm width and lengths up to 2500mm.

Door Edge Guards contain intumescent & smoke seals and have been fully fire tested up to 1/2 or 1 hours and eliminate the need for repetitive maintenance.

Available in aluminium or RAL Colours up to 2500mm long & Widely specified throughout the UK healthcare market.

Converts leaf stile doors to swing stiles

Impact tested to 200kg at 3.5 m.p.h and 50kg at 7m.p.h

Product Availability

Length

Standard Length 2100mm - Longer lengths to order up to 2500mm

Colours

Standard Satin Aluminium (SAA) colour or any RAL colour to order (Please specify RAL code)

Rounded				
Product Code	Description	Colour	Rating	Size
AFDEGR/44SAA	Rounded Door Edge Guard	SAA	30 min	44mm
AFDEGR/46SAA	Rounded Door Edge Guard	SAA	30 min	46mm
AFDEGR/55SAA	Rounded Door Edge Guard	SAA	60 min	55mm

Square				
Product Code	Description	Colour	Rating	Size
AFDEGF/44SAA	Flat Door Edge Guard	SAA	30 min	44mm
AFDEGF/46SAA	Flat Door Edge Guard	SAA	30 min	46mm
AFDEGF/55SAA	Flat Door Edge Guard	SAA	60 min	55mm

To Order & Specify

Please contact us and quote the following information -

Quantity / Product Description / Product Code / Colour / Size

Typical wording - 10 / Astro Aluminium Rounded Door Edge Guard / AFDEGR/44SAA / SAA / 44mm

>> Tel: [01329 844 500](tel:01329844500) or >> Email: sales@astroflame.com

Installation

For further information on installation requirements please contact the technical team on: tel [01329 844 500](tel:01329844500) or email sales@astroflame.com

Fire Test and Assessment Reports

Fire rating: BS476 Parts 20 & 22 for 30 & 60 minutes and EN1634 to 30 minutes.

For further information please contact the technical team on: tel [01329 844 500](tel:01329844500) or email sales@astroflame.com

Health and Safety

For further information on health and safety requirements please contact the technical team on: tel [01329 844 500](tel:01329844500) or email sales@astroflame.com

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME (FIRE SEALS) LTD has no control over the specific application or installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product based on the products limitation of applications and that the product is fit for purpose for their intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROFLAME (FIRE SEALS) LTD, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice. If you are in any doubt as to the suitability of this product for your intended application please contact our technical team on 01329 844500 or email sales@astroflame.com and we will contact you.