

# HIGH OUTPUT TWINSPOT

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

**Ringtail**  
Lighting



The TSWS range is an architectural twinspot unit suitable for exterior applications and open areas.

- Manufactured in a white robust finished steel enclosure.
- Twin high output tungsten halogen lamps.
- Designed in accordance with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- IP65 ingress protection.
- Supplied with hex key screws - can be mounted in many orientations due to the battery clamps.
- Optional "delay on feature" - adjustable timer function, upon the restoration of power after a mains failure the heads will remain illuminated for a pre set period.
- Available in white, black or a number of alternative finishes including British Standard and RAL colour.

## Specification

- IP65 as Standard
- High Light Output
- Adjustable Heads
- Tungsten Halogen
- 3 Hour Standby Operation
- LED Lamp Monitoring
- Hex key screws




## Options

### Options

/R	Remote heads
/T	Delay on timer
/DALI	DALI addressable (1 hour 55W only)
/RAL	RAL Colour finish

## Dimensions

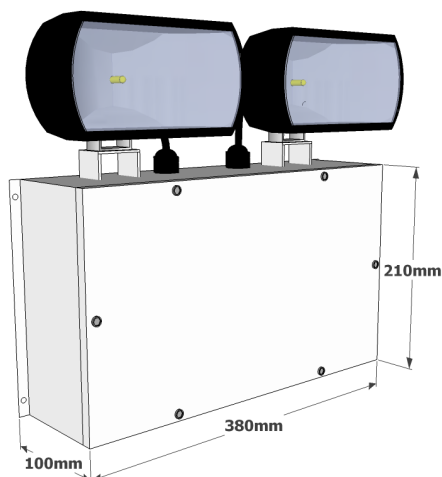

## Suitable Applications

- Designed for use in multiple industrial and architectural applications.
- Ingress protection up to IP65 suitable for interior and exterior applications.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

## Technical Specification

	Model	Lamp	Power Con	Battery	Duration	Weight	Output (lumens)
<b>TSWS20NM</b>	Non Maintained	2 x 20W Tungsten Halogen	24 W	12V 14Ah	3 Hours	10.1 Kg	2 x 360 Lumens
<b>TSWSP20NM</b>	Non Maintained	2 x 20W Polycarbonate Tungsten Halogen	24 W	12V 14Ah	3 Hours	10.1 Kg	2 x 360 Lumens
<b>TSWS55NM1</b>	Non Maintained	2 x 55W Tungsten Halogen	24 W	12V 14Ah	1 Hour	10.1 Kg	2 x 900 Lumens
<b>TSWSP55NM1</b>	Non Maintained	2 x 55W Polycarbonate Tungsten Halogen	24 W	12V 14Ah	1 Hour	10.1 Kg	2 x 900 Lumens

## Installation Notes

- Mounting - Please ensure that suitable plugs and screws are used to fix unit.
- Comes with hex key securing screws and can be mounted in many orientations.
- IP65 ingress protection - A 20mm cable gland is provided to maintain seal.

## Materials / Finish

- White robust finished steel enclosure.
- Available in white, black or a number of alternative finishes including British Standard and RAL colour.

## Catalogue Numbers

<b>X-TSWS3NM</b>	Non-Maintained
<b>X-TSWS6NM</b>	Non-Maintained