


# YBO-BSB2 Base Sounder Beacon Light Coverage APPLICATION NOTE


O Rated Light Output Volumetric Coverage Diagram (Red LED)		
Hochiki Model Numbers	HFP Model Numbers	HDR Model Numbers
YBO-BSB2/RL YBO-BSB2(WHT)/RL	YBO-BSB2(WHT)-RL-HFP	1460180

Flash rate: 0.5 - 0.55Hz    Current Consumption: 7mA    Power Consumption: 110mW    Light Volume 8.43m<sup>3</sup>

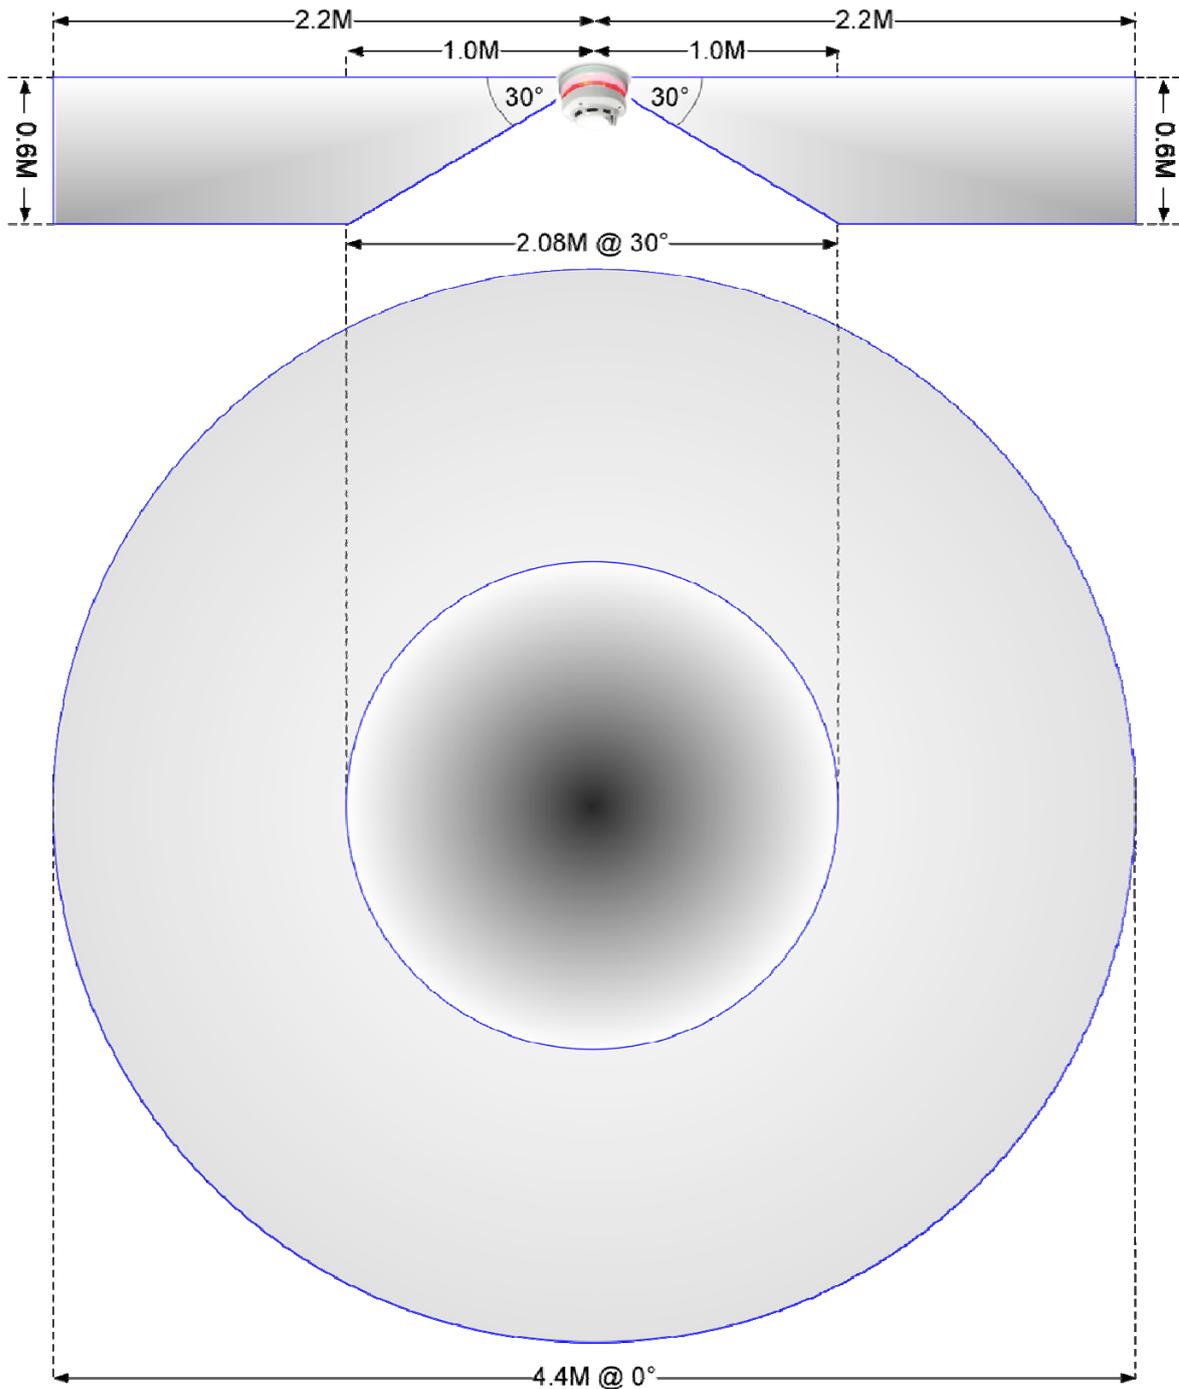

O Rated Light Output Volumetric Coverage Diagram (White LED)		
Hochiki Model Numbers	HFP Model Numbers	HDR Model Numbers
YBO-BSB2/WL YBO-BSB2(WHT)/WL	YBO-BSB2(WHT)-WL-HFP	1460190

Flash rate: 0.5 - 0.55Hz    Current Consumption: 7mA    Power Consumption: 110mW    Light Volume 3.65m<sup>3</sup>

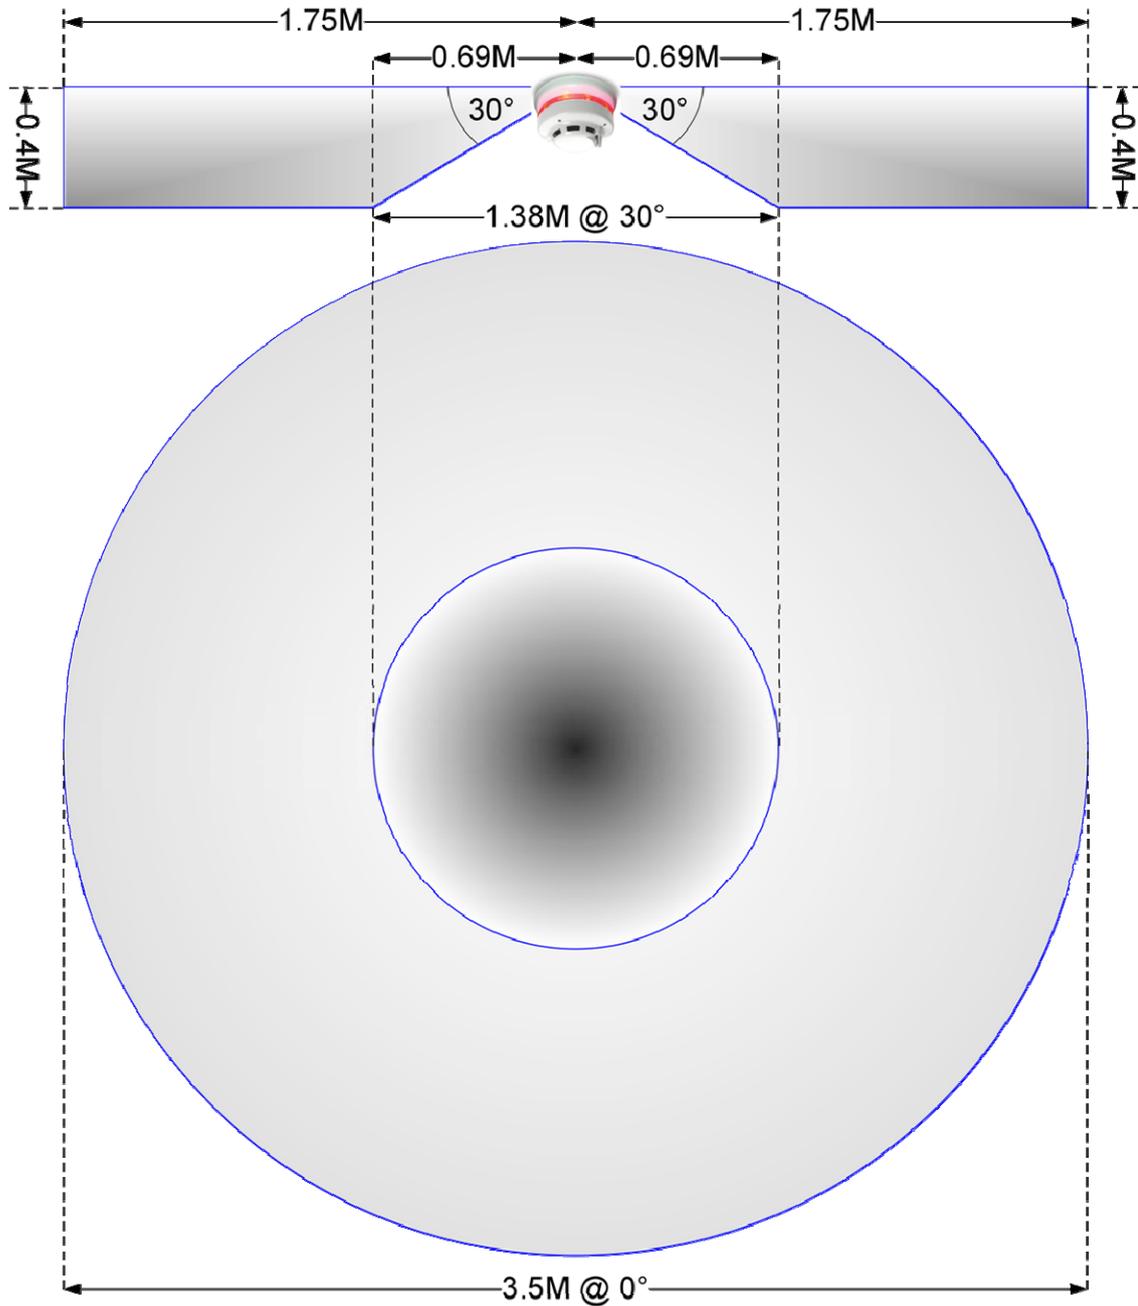

**Hochiki Europe (UK) Ltd**  
**Grosvenor Road, Gillingham Business Park,**  
**Gillingham, Kent, ME8 0SA, England**  
**Telephone: +44(0)1634 260133    Facsimile: +44(0)1634 260132**  
**Email: sales@hochikieurope.com    Web: www.hochikieurope.com**

Hochiki Europe (UK) Ltd. reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained within this document it is not warranted or represented by Hochiki Europe (UK) Ltd. to be a complete and up-to-date description. Please check our web site for the latest version of this document.