

LED SUSPENDED EXIT SIGN

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting



The MPI Light is a decorative, suspended, LED illuminated escape route and direction sign.

- High illumination LEDs in a small compact design.
- Energy-efficient LED emergency exit sign.
- Long life-span LEDs and batteries.
- Complies with the requirements of EN60598-2-22.
- Suitable for incorporation into emergency lighting system complying with BS5266-1:2011.
- IP40 rated.
- Self-testing exit sign - continuously tests battery voltage and the operation of LEDs every 15 days, and every 6 months.
- Diverse mounting options suitable for multiple applications with swivel knuckle connection.
- This luminaire can be operated in maintained or non-maintained mode. Factory set to maintained operation but to switch to non-maintained after connecting to the mains supply press and hold the test button.
- Other Legend types available.

Specification

- Adjustable drop length
- Long life White LEDs
- Manual test button
- Operating temp 0°C to 40°C
- Self Test
- Full drop 640 / 700 mm.
- Recess cutout 272 x 46mm.



Options

Options


/SK Swivel knuckle connections

/L Arrow Left

/R Arrow Right

Note: All exit signs are arrow down as standard please specify other direction if required

Dimensions

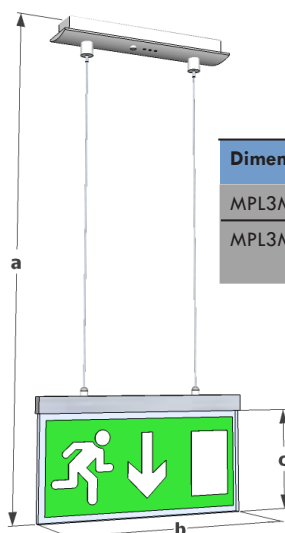

Dimensions (mm)

MPL3M-8 a=640, b=280, c=90

MPL3M-11 a=700, b=340, c=160

Viewing Distance

Viewing Distances

MPL3M-8 18 Metres

MPL3M-11 30 Metres

Suitable Applications

- Suitable for escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

| Model | Mode | Lamp | Battery | Power Con | Duration | Weight | Output (lumens) | Sign Dimensions (mm) |
|----------|------------|----------|----------|-----------|----------|--------|-----------------|----------------------|
| MPL3M-8 | Maintained | 12 LED's | 3.6V 1Ah | 6 VA | 3 Hours | 980g | 45 | 280 x 90 |
| MPL3M-11 | Maintained | 15 LED's | 3.6V 1Ah | 6.5 VA | 3 Hours | 1.15Kg | 55 | 340 x 170 |

Installation Notes

- Swivel knuckle joint option - mount unit either wall or ceiling.
- Recessed or surface mounted.

Materials / Finish

- Control gear box finished in RAL 9010.
- LED housing manufactured in aluminium.
 - Self extinguishing LED exit legend.

Catalogue Numbers

| | | |
|----------|------------|----------|
| MPL3M-8 | Maintained | 12 LED's |
| MPL3M-11 | Maintained | 15 LED's |