

CURVED LED EXIT SIGN

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting



A range of ISO 7010:2011 legends available.

The X-ESS Light a wall mounted, LED emergency escape route sign. Sleek and stylish in design with a convex front and perforated downlight. Including a self-testing feature to ensure that routine monthly and yearly tests are never missed.

- Comprising a white, stove-enamelled, zintec-coated sheet steel base, and fitted with a self-extinguishing legend panel.
- Passes 850°C hot-wire test.
- 20mm cable knockout to the back of unit.
- Designed in accordance with requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Self-testing unit - continuously tests battery voltage and operation of the LED's.
- Switchable maintained unit.
- Can be fitted with legends complying with the Health and Safety Signs Directive of 1996, a full range of BS5499 legends available.

Specification

- IP20 Interior Use
- High output LED light source
- Self Test as Standard
- Escape Route Sign
- Downlight Facility
- Choice of Legend
- Colour Options
- Self-Contained
- Dual operating unit



Options

Options

/L Arrow Left

/R Arrow Right


/DALI DALI

/CR Chrome finish

/BR Brass finish

Note: All exit signs are arrow down as standard please specify other direction if required

Dimensions

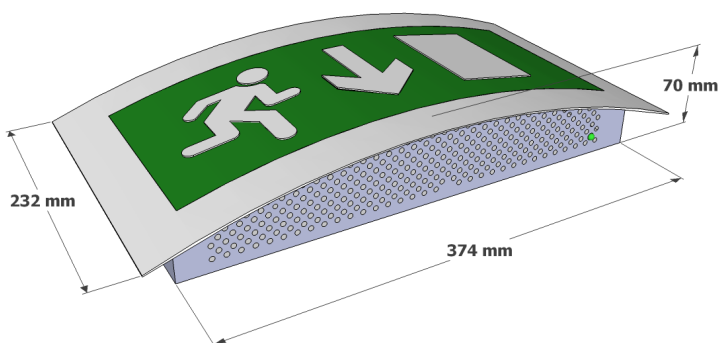

Viewing Distance

Viewing Distances

30 Metres

Suitable Applications

- Suitable for use on escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Suitable for use in Shopping centres, Hotels, Commercial offices and Theatres.

Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output
X-ESS3M	Maintained	6 CREE LED's	7 W	3.6V 3Ah Ni-Cd	3 Hours	2.0 Kg	150 Lumens
X-ESS3/SL	110V ACDC Slave						
X-ESS3/230	Mains only / 230V AC static inverter						

Installation Notes

- Wall mounted, emergency escape route sign.
- 20mm cable knock out in the rear of unit.

Materials / Finish

- White, stove-enamelled, zintec-coated sheet steel base.
- Self-extinguishing legend panel.
- Choice of alternative finishes including any British Standard or RAL colour.

Catalogue Numbers

X-ESS3M	Maintained
X-ESS3/SL	110V ACDC Slave
X-ESS3/230	Mains only / 230V AC Static inverter