

Single Doors 503A-B | 513-B | 523-B

BS EN 1125



THREE POINT LOCKING

Classification No.	3	7	6	B	1	3	2	2	A	A
EN 1125 : 2008										

- 503A-B** Push Bar Three Point Panic Bolt For Wooden Doors
- 503A-B/AD** Push Bar Three Point Panic Bolt For Aluminium Doors
- 503A-B/UD** Push Bar Three Point Panic Bolt For uPVC Doors

The Exidor 503A-B is an elegant and highly functional three point panic bolt for single and double door applications. Incorporated as standard is an automatic top trip. The three locking bolts ensures a higher level of security and the main body is fitted with an anti-thrust device, which prevents leverage of both the top and bottom shoot bolts from their sockets. For situations that require the panic bolt to be linked to a monitoring or alarm system, a microswitch can be fitted in the slave unit. The microswitch closes/opens an electrical circuit when the cross bar is operated.

- 513-B** Push Bar Three Point Panic Bolt With Vertical Latches For Wooden Doors
- 513-B/AD** Push Bar Three Point Panic Bolt With Vertical Latches For Aluminium Doors
- 513-B/UD** Push Bar Three Point Panic Bolt With Vertical Latches For uPVC Doors

The Exidor 513-P offers all the elegance and functions of the Exidor push bar three point panic bolt with the added feature of vertical Pullman latches, which increases security and offers a smooth latching action.

- 523-B** Push Bar Three Point Panic Bolt With Horizontal Latches For Wooden Doors
- 523-B/AD** Push Bar Three Point Panic Bolt With Horizontal Latches For Aluminium Doors
- 523-B/UD** Push Bar Three Point Panic Bolt With Horizontal Latches For uPVC Doors

The Exidor 523-B offers all the security, elegance and functions of the Exidor push bar three point panic bolt with the added feature of horizontal Pullman latches, which increases security and offers a smooth latching action.

- Non-handed
- CE marked for safety
- Surface mounted
- 38mm wide footprint
- Suitable for doors with narrow stiles
- Microswitch version available
- Standard colours: silver, white with green cross bar and black with red cross bar
- Available in most RAL colours



Standard Sizes

Standard size three point panic bolts are suitable for single doors up to 1220mm wide and 2440mm high. Special sizes are available on request.


Additional options

The Exidor reversible three point panic bolts can be supplied with a microswitch (suffix MS after the product code)

Optional accessories for all the three point panic bolts

- 500/LEC Outside access device with Euro cylinder – lever operated
- 500/LEA Outside access device with Euro aperture – lever operated
- 500/KEC Outside access device with Euro cylinder – knob operated
- 500/KEA Outside access device with Euro aperture – knob operated
- CL1 Mechanical push button outside access device
- CL2 Mechanical push button outside access device with passage facility
- CL3 Quick code mechanical push button outside access device
- CL4 Quick code mechanical push button outside access device with passage facility

Exidor threshold seal ES1 can be fitted as an alternative to the floor keep. Please suffix CB after the product code i.e. 503A-B/CB (See Exidor door seal range leaflet for details)

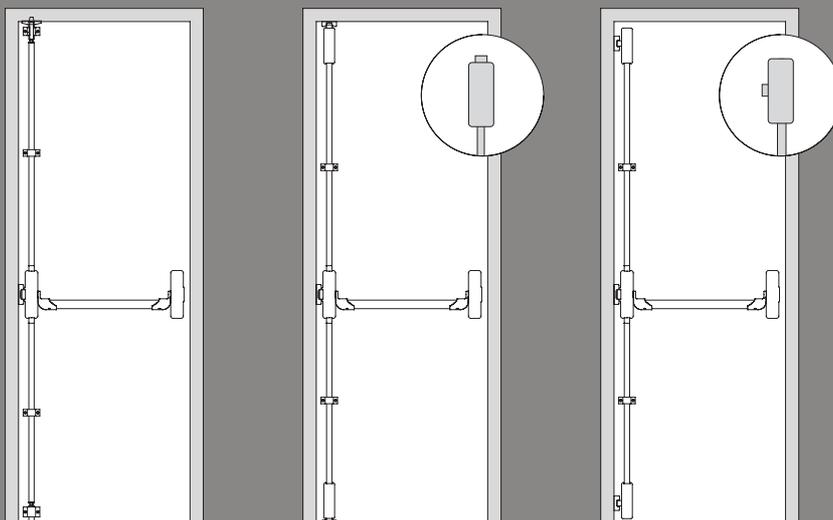

503A-B

513-B

523-B