





RHINE 2.5W UNIVERSAL LED EMERGENCY EXIT BOX

ARROW UP OR ARROW DOWN

FEATURES

- Maintained/non maintained
- Manual test button
- No switch-live required
- Top and rear 20mm entry
- Screen printed legends included
- Long lasting lithium battery
- Top and rear 20mm entry
- Left/right legends sold separately

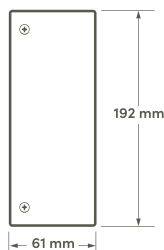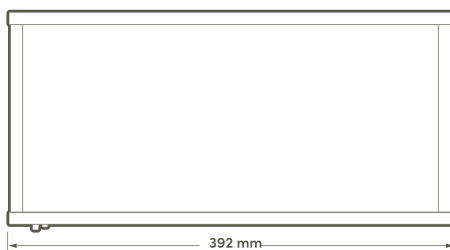

Product code (up): <i>Standard</i>	HSEM/LEDEB
Product code (down): <i>Standard</i>	HSEM/LEDEBD
Product code (up): <i>Self test</i>	HSEM/LEDEB-ST
Product code (down): <i>Self test</i>	HSEM/LEDEBD-ST

TECHNICAL INFORMATION

Rated voltage:	220-240 vAC 50/60Hz
Wattage:	2.5w (maintained mode)
Wattage:	1.5w (em mode)
Lumen output:	35Lm (maintained mode)
Lumen output:	17Lm (em mode)
Colour temperature:	6400k
Battery (LiFePO4):	3.2v 1600 mAh
Charging time:	24 hours
Battery protection:	overcharge & deep discharge protection
Ingress protection:	IP20
Minimum emergency duration:	3 hours
Operating temperature:	-10°C~30°C
Protection class:	Class I
Weight:	1054g
Produced in accordance with:	BS EN 60598-2-22



RoHS
Compliant

Certificate of Conformity available on request