



The GR Light is a general purpose, cost effective emergency luminaire especially suitable for interior environments.


- Comprising of a moulded self extinguishing polycarbonate base.
- Fitted with an opal diffuser.
- Complying with the requirements of EN60598-2-22
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- GR Light offers a cost effective solution to combine emergency lighting and mains lighting.
- High frequency switchable, maintained, non maintained, mains and sustained versions available.

Specification

- IP54
- 360mm Circular
- Polycarbonate base
- Opal Diffuser
- High Light Output
- 28w 2D / 17W LED
- Self Contained
- High Frequency
- DALI (fluorescent only)



Dimensions

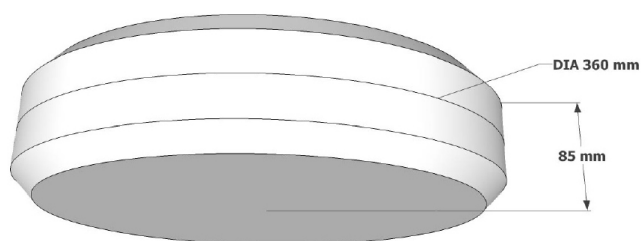

Options

Options

/BK	Black base
/OPAL	Opal diffuser
/MS	Microwave occupancy sensor
/ST	Self test
/DALI	DALI (fluorescent only)

Suitable Applications

- Suitable for all escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- Ideal for areas where higher light levels are required.

Technical Specification

	Lamp Type	Power Con	Battery	Duration	Weight	Mains Output	Emerg Output
GR28/230	28W 2D	28.7W	-	-	1.83 Kg	2050 Lumens	-
GR28M	28W 2D	25W	3.6V 4Ah	3 Hours	2.18 Kg	1640 Lumens	185 Lumens
GR-18/LED/230	LED	17W	-	-	2.80 Kg	2100 Lumens	-
GR-18/LED/EM3	LED	18W	Ni-Cd	3 Hours	2.97 Kg	2100 Lumens	144 Lumens

Installation Notes

- Diffuser is snap fit and can be gasketed to base to provide seal up to IP54.
- Gear tray is easily removable to allow first fix of base.

Materials / Finish

- Comprising of a moulded self extinguishing polycarbonate base.
- Fitted with an opal diffuser.
- Black base option available.

Catalogue Numbers

GR28/230	28W 2D	28.7W
GR28M	28W 2D	25W
GR-18/LED/230	LED	17W
GR-18/LED/EM3	LED	18W