

A quality decorative luminaire with sympathetic looks to please architects and designers, the XL demonstrates that emergency lighting need no longer be a compromise. A matching mains version for either wall or ceiling installations enhances the offer.



- White, stove-enamelled spun steel base.
- Fitted with an elegantly shaped polycarbonate opal diffuser.
- XL Light is designed for use on escape routes.
- 850°C hot-wire test, as defined by ICEL.
- The diffuser is a snap fit and provides a seal to IP20.
- A BESA entry is in the base.
- Complying with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- The XL Light effectively combines emergency lighting and mains lighting.
- In white as standard - available in a wide number of alternative finishes, including British Standard or RAL colour, brass and chrome.
- Switchable, maintained, non maintained, mains and sustained versions available.

## Specification


- IP20 (Interior Use)
- Circular – 425mm
- Opal or Prismatic Diffuser
- High Light Output
- 28W 2D and 38W 2D Lamp
- 2 x 18W and 2 x 26W PLC
- Colour Options
- Self-Contained
- High Frequency



## Options

| Options |                            |
|---------|----------------------------|
| /CR     | Chrome version             |
| /SC     | Satin chrome version       |
| /BR     | Brass version              |
| /HO     | Hold off relay             |
| /MS     | Microwave occupancy sensor |
| /ST     | Self test                  |
| XL/BEZ  | Semi recessing kit         |
| /DALI   | DALI                       |

## Dimensions

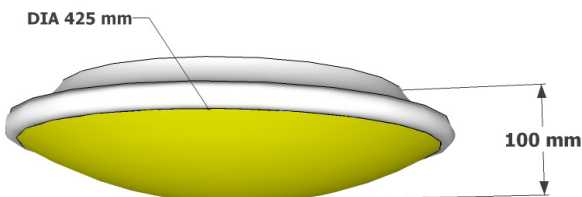

425 & 525 diameters available

## Suitable Applications

- Suitable for all escape routes and intersections.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

## Technical Specification

|                     | Lamp Type | Power Con | Battery  | Duration | Weight  | Mains Output | Emerg Output |
|---------------------|-----------|-----------|----------|----------|---------|--------------|--------------|
| <b>XL28/230/425</b> | 28W 2D    | 28.7W     | -        | -        | 1.49 Kg | 2050 Lumens  | -            |
| <b>XL28M/425</b>    | 28W 2D    | 29W       | 3.6V 4Ah | 3 Hours  | 1.84 Kg | 1845 Lumens  | 185 Lumens   |

## Installation Notes

- Snap fit diffuser.
- BESA entry is provided in base.

## Materials / Finish

- White, stove-enamelled spun steel base.
- Polycarbonate opal diffuser.
- Alternative finishes - British Standard or RAL colour, brass and chrome.

## Catalogue Numbers

|                     |        |       |
|---------------------|--------|-------|
| <b>XL28/230/425</b> | 28W 2D | 28.7W |
| <b>XL28M/425</b>    | 28W 2D | 29W   |