



A Range of slim line exit signs suitable for incorporation into aesthetically pleasing interior environments, where ceiling height is an important factor. Designed to be installed above doorways where there is limited ceiling height manufactured from sheet steel with polycarbonate exit sign. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005. Chrome finish as standard, other finishes available complete with legend.

## TYPICAL APPLICATIONS

- Corridors
- Stairwells
- Office complexes
- Show rooms
- Hotels
- Student accommodation

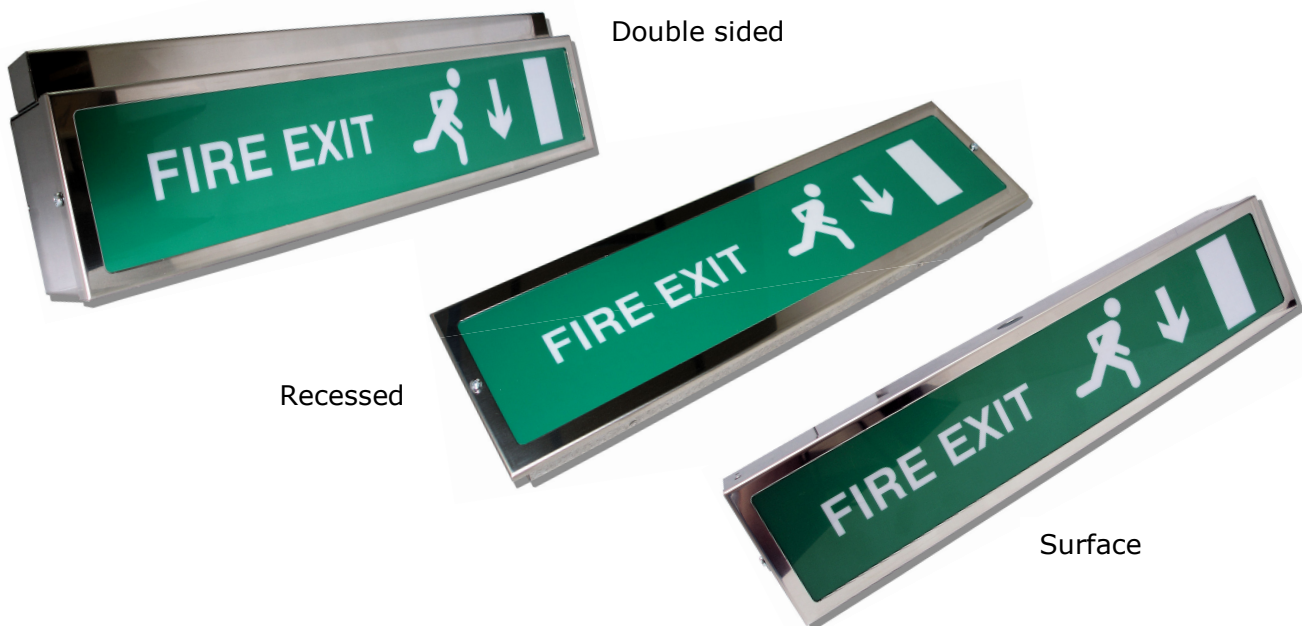

- IP20
- Chrome finish as standard
- Prismatic down light for surface and double sided versions
- 8W T5 Lamp
- Self-Contained
- Central battery system (Static / AC/DC)

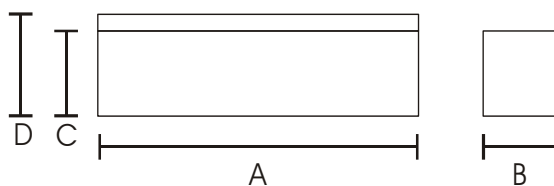

Dimensions	A	B	C	D
Surface	435 mm	55 mm	97 mm	
Double sided	435 mm	55 mm	97 mm	124 mm
Recessed	455 mm	65 mm	125 mm	

	Mode	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output
ESD8NM	Non Maintained	8W T5	8 VA	2.4V 4Ah	3 Hours	1.4 Kg	100 Lumens
ESD8M	Maintained	8W T5	20 VA	2.4V 4Ah	3 Hours	1.75 Kg	100 Lumens
ESD8/SL/*	Mains or Slave	8W T5	7 - 20 VA	-	-	1.2 - 1.5 Kg	270 Lumens

\* Please suffix voltage required i.e. 24, 50, 110, 230  
 Suffix part number with

/RS - Recessed Version  
 /DS - Double Sided Version

/L - Left Arrow  
 /R - Right Arrow  
 /W - White finish

NOTE: All exit signs arrow down as standard if other direction is required please specify