


The HR Light is a general purpose, luminaire suitable for exterior environments. Manufactured from a die cast aluminium base and grill with a injection moulded polycarbonate opal diffuser. The diffuser is held in place by captive screws with a silicon rubber gasket to provide the seal. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005. The HR Light offers an effective solution to combine emergency lighting and mains lighting, or where higher light levels are required, available in black or silver finish. Emergency version is high frequency only.

TYPICAL APPLICATIONS

- Corridors
- Stairwells
- Office complexes
- Public areas
- External anti-panic areas



- IP65
- Die cast aluminium base & grill
- Opal polycarbonate diffuser
- High Light Output
- 28w 2d Lamp
- Black or Silver
- Self-Contained
- Centrally Supplied
- High Frequency

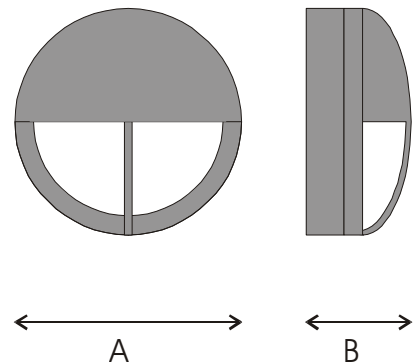

Dimensions	A	B
16W Mains only	265 mm	120 mm
Mains & Emergency	363 mm	140 mm

	Mode	Lamp Type
Small Body		
HR16/230	Mains only	16W 2D
Large Body		
HR28/230	Mains only	28W 2D
HR38/230	Mains only	38W 2D
HR218/230	Mains only	2 x 18W PLC
HR226/230	Mains only	2 x 26W PLC
Emergency		
HR28M	Maintained	28W 2D
HR38M	Maintained	38W 2D
Suffix part number with /SR - Silver finish		