# RECESSED LED EXIT SIGN







The X-MPRL is a decorative escape route sign. The X-MPRL uses high output LED light sources in a small compact shell. Virtually maintenance with the addition of Self-Test and DALI facilities.

- Manufactured Stove enamelled sheet steel base unit, fitted with a white bezel.
- Designed in accordance with the requirements of EN60598-2-22. EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2005.
- IP20 ingress protection.
- Designed to be recess ceiling mounted providing a low profile emergency lighting option.
- Self-Test as standard.
- Switchable maintained unit.
- Available in white, chrome or brass finish.







A range of BSEN ISO 7010 legends available.

### **Specification**

- Self-Test/Dali
- Hinged gear tray
- Recess mount
- High output LED light source
- **IP20**
- Chrome and brass finishes available
- Dual operating unit












# **Options**

Options				
/CR	Chrome finish			
/BR	Brass finish			
/L	Arrow left			
/R	Arrow right			
/DALI	DALI			

Note: All exit signs are arrow down as standard please specify other direction if required

#### **Dimensions**

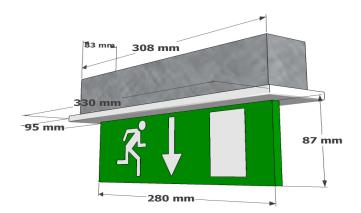

### **Viewing Distance**

**Viewing Distances** 17 Metres

#### **Suitable Applications**

- Suitable for escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.





# RECESSED LED EXIT SIGN

6335 - sales@ringtail.co.uk

# **Technical Specification**

		Model	Lamp Type	Power Con	Battery	Duration	Weight	Output Lumens
	X-MPRL3M	NM/Maintained (Self Test)	6 LED's	7 W	3.6V 3Ah NiMh	3 Hours	1.65 Kg	150
	X-MPRL3M/DALI	NM/Maintained (DALI)	8 LED's	4 W	3.6V 3Ah NiMh	3 Hours	1.95 Kg	80

### **Installation Notes**

- The bezel is attached by captive screws and provides a seal to IP20.
- The gear tray is hinged for ease of installation and is easily removable to allow first fix of the base.

#### **Materials / Finish**

- Stove enamelled sheet steel base fitted with a white bezel.
- Available in white, chrome and brass finish.

# **Catalogue Numbers**

X-MPRL3M	NM/Maintained (Self Test)		
X-MPRL3M/DALI	NM/Maintained (DALI)		

