

# 8 WATT CURVED EXIT SIGN

The ESS Light is an attractively designed, wall mounted, emergency escape route sign. The convex front and perforated downlight section make for an eye-catching alternative.




Comprising a white, stove-enamelled, zintec-coated sheet steel base, and fitted with a self-extinguishing legend panel, the ESS Light is designed for use on escape routes and final exits. It conforms with the 850°C hot-wire test, as defined by ICEL.

The ESS Light has a 20mm cable knockout to the back. It complies with the requirements of EN60598-2-22 and is suitable for incorporation into an emergency lighting system complying with BS5266-1:2011. With flexibility in mind, there's a comprehensive choice of alternative finishes including any British Standard or RAL colour. Switchable, Maintained, Non-Maintained.

Viewing Distance 30 Metres

Model	Mode	Lamp Type	Power Con	Battery	Duration	Weight
ESS8NM	Non Maintained	8W T5	8 W	2.4V 4Ah	3 Hours	2.01Kg
ESS8M	Maintained	8W T5	20 W	2.4V 4Ah	3 Hours	2.18 Kg
ESS8/SL/*	ACDC Slave. * suffix voltage required with 24, 50, 110					
ESS8/230/HF	Mains only / Static inverter					

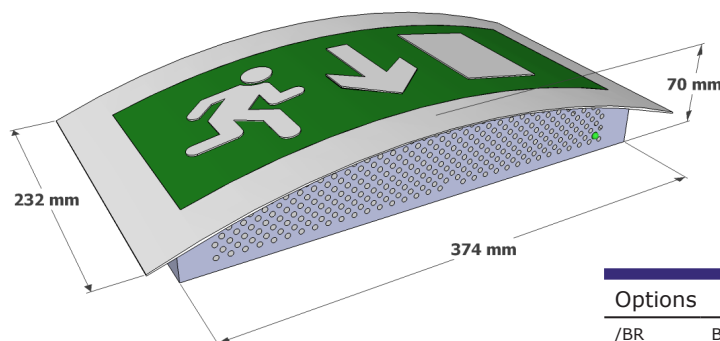

- IP20 Interior Use
- Escape Route Sign
- Downlight Facility
- Choice of Legend
- Colour Options
- Brass or Chrome Versions
- Self-Contained

## Options

/BR	Brass finish
/CR	Chrome finish
/L	Arrow left
/R	Arrow right
/ST	Self test
/DALI	DALI

Note: All exit signs are arrow down as standard please specify other direction if required