

HIGH OUTPUT TWIN SPOT

www.ringtail.co.uk - +44 (0) 1772 336335 - sales@ringtail.co.uk

Ringtail
Lighting



The TS Light provides an effective solution to emergency lighting in high and large areas.

- Comprising of a white finished steel enclosure fitted with twin high output tungsten halogen floodlight lamps.
- Suitable for use on escape routes (850° C hot-wire test, defined by ICEL)
- Complying with the requirements of EN60598-2-22.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.
- The TS range comes complete with lamps and batteries.
- Non - Maintained as standard, Maintained and Delay Timer versions available.

Specification

- High Light Output
- Adjustable Heads
- Tungsten Halogen
- DALI (1 hour only on 55W)
- 2 x 20w and 2 x 55w lamp types
- 3 Hour Standby Operation
- LED Lamp Monitoring
- Universal Mounting Orientation
- /P Polycarbonate Heads option - Suitable for use in food production facilities
- /M maintained operation option (20W only)




Options

Options

/R	Remote heads
/T	Delay on timer
/110	110V isolating transformer
/ST	Self Test
/DALI	DALI (1 hour only on 55W)
/P	Polycarbonate Heads
/M	Maintained operation (20W only)

Dimensions

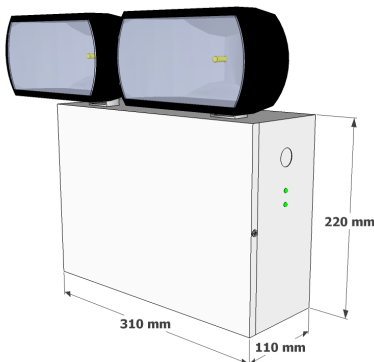

Suitable Applications

- Designed for use in large open areas, warehouses, sports halls, arenas and atriums.
- Suitable for escape routes.
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011.

Technical Specification

	Model	Lamp Type	Power Con	Battery	Duration	Weight	Output	
	TS20NM	Non-Maintained	2 x 20W Tungsten Halogen	24 W	12V 14Ah	3 Hours	8.1 Kg	2 X 360 Lumens
	TSP20NM	Non-Maintained	2 x 20W Polycarbonate Tungsten Halogen	24 W	12V 14Ah	3 Hours	8.1 Kg	2 X 360 Lumens
	TS55NM1	Non-Maintained	2 x 55W Tungsten Halogen	24 W	12V 14Ah	1 Hour	8.1 Kg	2 x 900 Lumens
	TSP55NM1	Non-Maintained	2 x 55W Polycarbonate Tungsten Halogen	24 W	12V 14Ah	1 Hour	8.1 Kg	2 x 900 Lumens

Installation Notes

- Three 20mm knockouts are available on the top and sides of the unit offering flexibility of cabling.
- Universal mounting orientations.

Materials / Finish

- White finished steel enclosure.
- Twin high output tungsten halogen floodlight lamps.

Catalogue Numbers

TS20NM	Non-Maintained	2 x 20W Tungsten Halogen
TSP20NM	Non-Maintained	2 x 20W Polycarbonate Tungsten Halogen
TS55NM1	Non-Maintained	2 x 55W Tungsten Halogen
TSP55NM1	Non-Maintained	2 x 55W Polycarbonate Tungsten Halogen